


PIPELINE CM6 – P

PENDANT

MANUFACTURED IN CANADA

CAINE HEINTZMAN / 2013

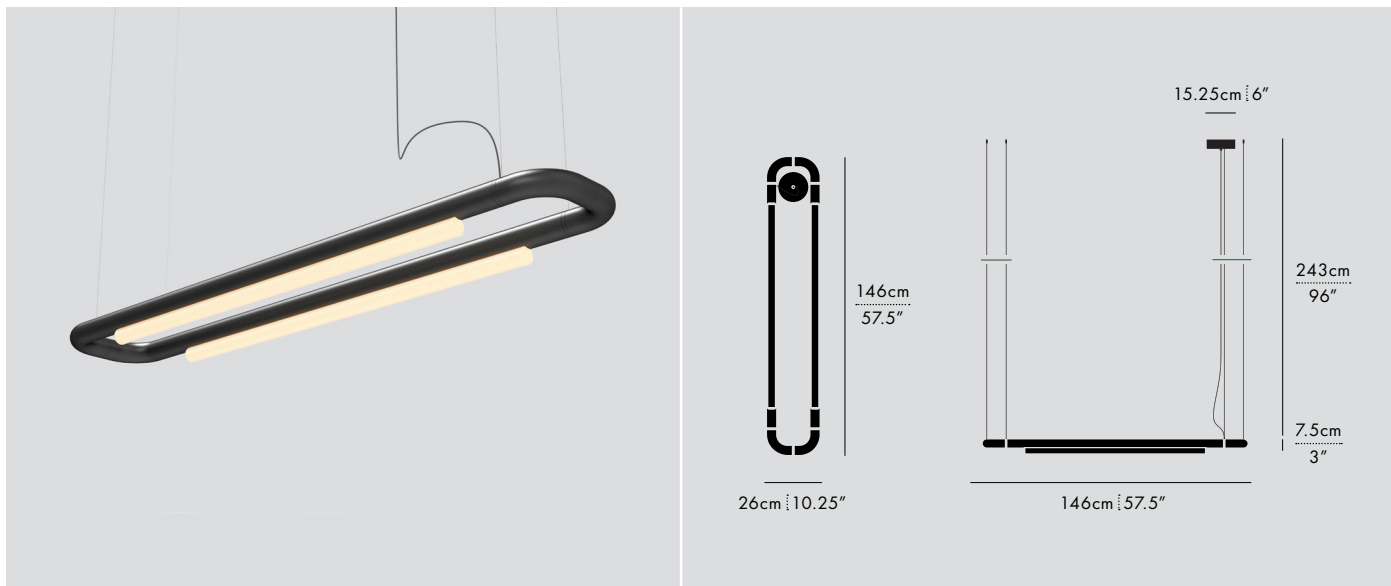

PIP-CM6-P-BK-27-ELV-120

DESCRIPTION

Space efficient, the surface mounted Pipeline provides accent lighting while becoming an integral element of the environment it is set in.

TYPE

Pendant

DIMENSIONS

- Luminaire: 146.3 x 26.1 x 7.5cm / 57.6" x 10.3" x 3"
- Adjustable drop length: 243cm / 96"
- * CUSTOM LENGTH AVAILABLE

CERTIFICATIONS




* APPLICATION: DRY INDOOR LOCATION ONLY


TECHNICAL INFORMATION

- Input Voltage: 110–120V, 220–240V, 110–277V
- Lamping: Integral 34W 24V DC LED
CRI 90+, 50,000 hours
- Lumens: 1432 lumens delivered
- Power Supply: Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



MATERIALS

- Aluminum
- Acrylic

FINISHES



BLACK "BK"



WHITE "WH"



RAW "RA"



BRASS "BR"



COPPER "CP"



CHROME "CH"



FOR CUSTOM FINISHES,
PLEASE INQUIRE.

SERIES	SIZE	TYPE	BODY FINISH	END CAP/ JOINER/ELBOWS	CCT	PS	VOLTAGE IN
PIP	CM6	P	☐ BK (BLACK)	☐ BK (BLACK)	☐ 27 (2700K)	☐ ELV	☐ 120
			☐ WH (WHITE)	☐ WH (WHITE)	☐ 30 (3000K)	☐ 010	☐ 230
			☐ RA (RAW)	☐ BR (BRASS)	☐ 35 (3500K)	☐ DAL	☐ 277*
				☐ CP (COPPER)	☐ 41 (4100K)		
			☐ BR (BRASS)	☐ CH (CHROME)	☐ DW (DIM TO WARM)		
			☐ CP (COPPER)				
			☐ CH (CHROME)				

*277 ONLY AVAILABLE WITH 010