


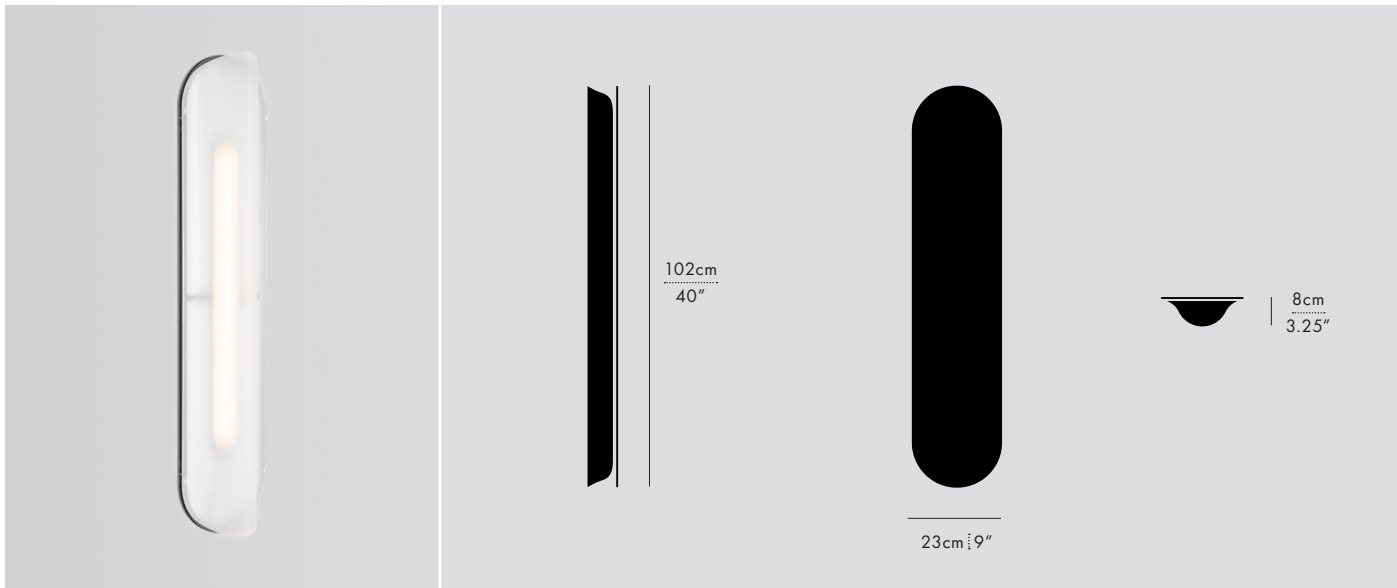

VAL-1-CW-ANT-27-ELV-120

VISIT [A-N-D.COM](https://www.a-n-d.com) FOR 3D MODELS INCLUDING REVIT/IES.

DESCRIPTION

Vale optimises functionality through its multidirectional luminescence while diffusing soft ambient light.

TYPE

Ceiling/Wall

DIMENSIONS

- Luminaire: 102 x 8 x 23cm / 40" x 3.25" x 9"

POWER OPTIONS NORTH AMERICA

- Coverplate
- Mounts to standard depth octagon box
- Remote power supply for multiple Vale arrangements


POWER OPTIONS WORLD MARKET

- Surface mounted
- Remote power supply only

TECHNICAL INFORMATION

- Input Voltage: 110–120V, 220–240V, 110–277V
- Lamping: Integral 10W 24V DC LED CRI 90+, 50,000 hours
- Lumens: 694 lumens delivered
- Power Supply: Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



CERTIFICATIONS



* APPLICATION: DRY INDOOR LOCATION ONLY


MATERIALS

- Aluminum
- Acrylic


FRAME FINISHES



LENS FINISH



CLEAR (CLR)



SERIES	UNIT	TYPE	FINISH	CCT	PS	VOLTAGE IN
VAL	☐ 1	CW	☐ ANT (ANTHRACITE)	☐ 27 (2700K)	☐ ELV	☐ 120
			☐ SIL (SILICA)	☐ 30 (3000K)	☐ 010	☐ 230
			☐ RST (RUST)	☐ 35 (3500K)	☐ DAL	☐ 277*
				☐ 41 (4100K)		
				☐ DW (DIM TO WARM)		

*277 ONLY AVAILABLE WITH 010



1951 Franklin St
Vancouver, B.C.
Canada V5L 0C7

+1 604 563 6938
info@a-n-d.com
a-n-d.com

POSSIBLE ORIENTATIONS

The Vale Ceiling/Wall suspends horizontally or vertically on the ceiling or wall.

