



Model Sheet

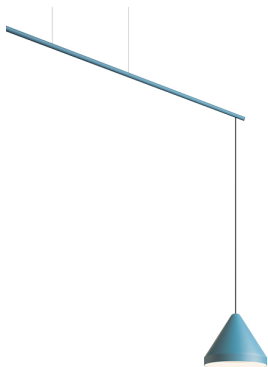

Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish

- 42 Blue M1
NCS S 5010-B10G
- 24 Beige M1
NCS S 2005-Y50R
- 10 White
NCS S 0300-N
- 11 Black
NCS S 8500-N

LED temperature color

2700 K / 3000 K /
3500 K

Dimming

Push; 1-10V / Casambi / DALI-2

Installation type

Surface Canopy

Materials

Ceiling rose: Steel

Light source

1 x LED 9W 350mA



LED

CRI>90 1041 lm 116
2700 K / 3000 K / 3500 K

Driver

Constant Current 350 110~240
V V 50~60 Hz HZ



Dimmable **LED**

IP20 **Bi-volt** **50-60Hz**

Application

Hanging lamps


Packaging

2 Box
2.07 m x 0.125 m x 0.125 m
Gross weight 4,9
Net weight 1
Vol. 0.0436



Lighting effect

Hidden Diffuser

Subtly directed diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data



Other Applications

