

Sento sospeso flat pro datasheet


LED suspended luminaire with double sided light output, luminous power 2 x 18W. Lighting effect changeable via optional inserts.

flat-version with height adjustment

LED suspended luminaire freely height adjustable and flat base base for mounting on hollow ceiling, connection to constant current source (driver). Extern dimmable (depending on the power supply unit).

flat-version with fixed length

LED suspended luminaire with fixed height adjustment and flat base for mounting on hollow ceiling, connection to constant current source (driver). Extern dimmable (depending on the power supply unit).

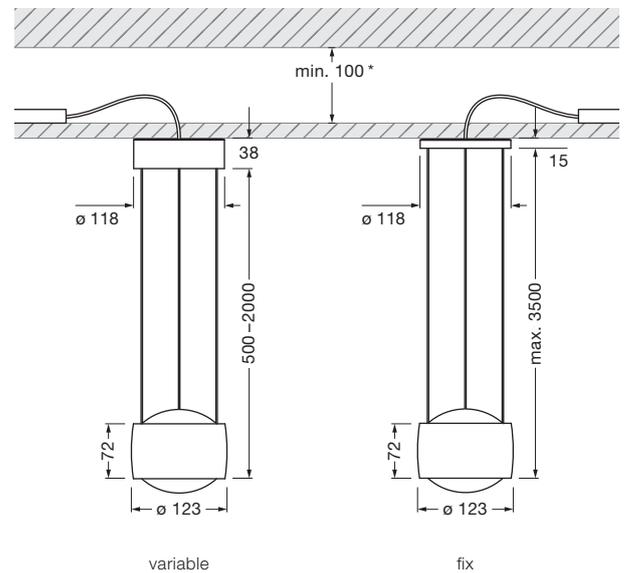

* with Occhio converter

dimensions in mm

technical data Sento sospeso flat pro


properties	material	aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic
	height adjustment (variable)	500 – 2000 mm (variable)
	height setting (fix)	max. 3500 mm (can be adjusted during fitting)
	weight	variable: 2.4 kg / fix: 1.9 kg
surface	head	shiny chrome, matt chrome, glossy white, matt white, matt black, matt gold, rose gold, bronze, phantom, black phantom
	base	shiny chrome, matt chrome, glossy white, matt white, matt black, matt gold, rose gold, bronze, phantom, black phantom
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (74 lm / W)
	power	LED 2 x 18 W max. 2 x 500 mA (> 36 V DC) / LED 2 x 13 W* max. 2 x 350 mA (> 36 V DC)
	color rendering index	perfect color; CRI Ra 97 high flux; CRI Ra 85
	color temperature	2700, 3000 K 3000, 3500, 4000 K
electricity	dimming	with trailing edge phase cut dimmer, push button, DALI or 1–10V (depends on driver)
	power supply unit	remote, driven by constant current source max. 2 x 500 mA / 36 V DC
	permitted operating conditions	max. 30°C for indoor use only

version chrome, rose gold, bronze, phantom, black phantom

Sento sospeso flat pro overview inserts

lens		
diffuser glass		
soft edge glass (optional)		
satinised glass (optional)		
double-sided head		
satinised glass (optional)		
soft edge glass (optional)		
lens		

Sento sospeso flat pro lighting effects

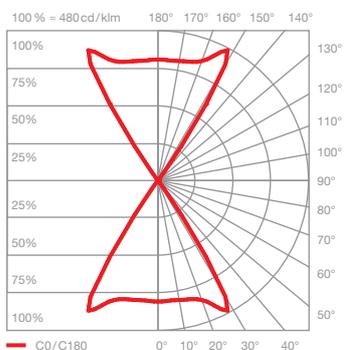


Sento D

directed light in both directions beam angle approx. 80°

inserts: lens
lens

luminous flux:	perfect color	2 × 18 W	2460 lm
	high flux	2 × 18 W	3380 lm
	perfect color	2 × 13 W	1690 lm
	high flux	2 × 13 W	2460 lm

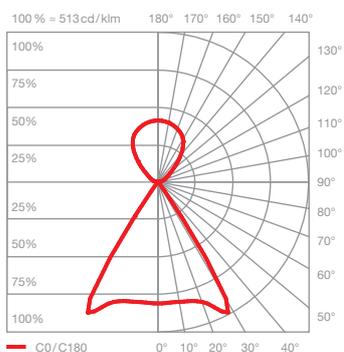

Sento E

diffuse up light directed down light beam angle approx. 80°

inserts: satinised glass
lens

luminous flux:	perfect color	2 × 18 W	2300 lm
	high flux	2 × 18 W	3160 lm
	perfect color	2 × 13 W	1580 lm
	high flux	2 × 13 W	2300 lm