

TECHNICAL CHARACTERISTICS

PDUO

# Dúo





## **Pedestal**

A wide range of possibilities. Our pedestals, with an extensive variety of options available, different size and shapes -square or round - and an endless number of finishes.

DESIGNED BY ONDARRETA TEAM



**ondarreta**

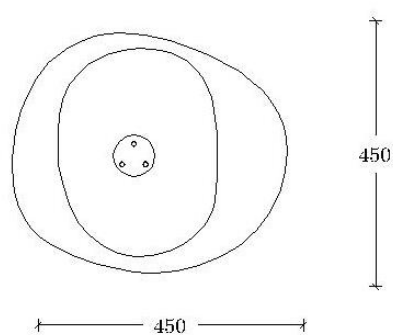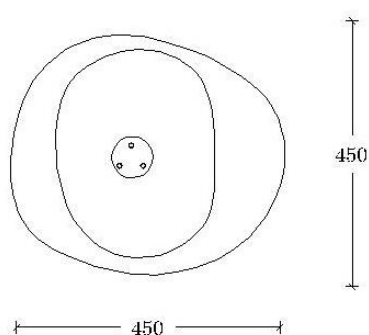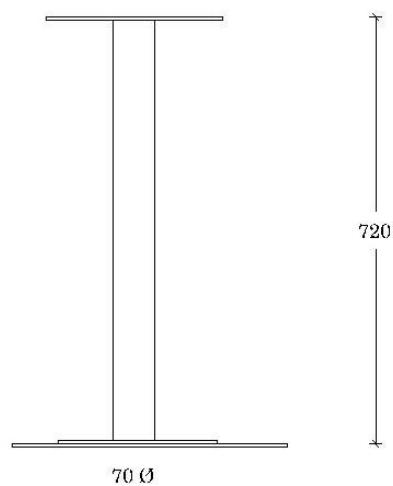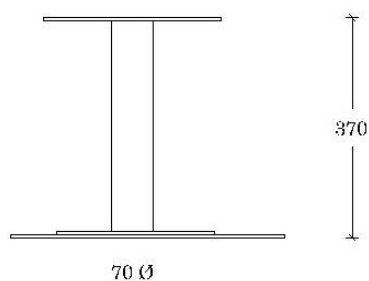

## DIMENSIONS

H37: 45 cm x 45 cm x 37 cm  
 (17.7" x 17.7" x 14.6" )  
 [width x depth x height]  
 H72: 45 cm x 45 cm x 72 cm  
 (17.7" x 17.7" x 28.3" )  
 [width x depth x height]

## WEIGHT

H37: 14 kg (30.9 lb)  
 H72: 15 kg (33.1 lb)

## PACKAGING

Base 50 cm x 50 cm x 4 cm  
 Column H37: 42 cm x 10 cm x 10 cm  
 Column H72: 80 cm x 10 cm x 10 cm

## CERTIFICATION

Product tested under the European standard EN 161399:2013, category of general use L1.

## ORIGIN

100% Made in Europe

## DESIGN

Ondarreta Team

**ondarreta**



**ondarreta**

## COMPONENTS

### COLUMN

#### Material

70 mm (2.75") diameter and 2 mm (0.08") thick cold laminated St-37 quality steel tube.  
Tensile Strength: 340-470 N/mm<sup>2</sup> (49,300-68,160 psi);  
Elastic Limit > 235 N/mm<sup>2</sup> (32,080 psi); Elongation > 25%,  
Surface Hardness > 110 HB.

#### Finish

Epoxy Colour

### BASE

#### Material

Two overlapping irregular section St-37 (S-235) 5 mm steel sheet, inspired in organic forms and cut by laser.

#### Finish

Epoxy Colour

### TABLETOP SUPPORT

#### Material

Ø120 mm (4.7") and 16 mm (0.6") thickness steel cylinder (for glass worktops) or a 295 mm (11.6") side and 5 mm (0.2") thick square steel sheet (for other worktops).

#### Finish

Chromed (in glass tabletops) or colour epoxy (other tabletops).

### TABLETOP

#### Material

A variety of beechwood, laminate, glass, compact, indoor compact, porcelain and laminate+birch plywood surfaces.

#### Finish

As on samplecard

#### Dimensions

Maximum tabletop H72: Ø90 cm / 80 cm x 80 cm

## METAL FINISHES

### EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven cured at 200°C (392°F).

#### Technical Characteristics:

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence)