


Model Sheet

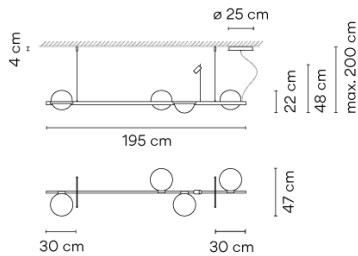

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	18 Graphite ADAPTA RF 9913 WX
	93 White RAL 9016
LED temperature color	2700 K / 3000 K / 4000 K
Dimming	CASAMBI / DALI 1-10V PUSH

Installation type	Surface Canopy
--------------------------	----------------

Materials	Profile: Aluminum
	Diffuser: Blown-glass
	Flowerpot: PMMA (thermoplastic polymer)

Light source	6 x LED 4,6W 500mA
	1 x LED 2W 500mA



LED	CRI>90 2057.53 lm 2700 K / 3000 K / 4000 K
------------	---

Driver	Constant Current 500 110~240 V V 50~60 Hz HZ
---------------	--

Remarks	Plants not included
----------------	---------------------

Application	Hanging lamps
--------------------	---------------

Packaging	1 Box
	2.17 m x 0.33 m x 0.31 m
	Gross weight 12.29
	Net weight 8.16 Vol. 0.2219

Lighting effect

General Lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	1
Coordinate System	CG
Total Flux	1912.81 lm
Maximum Value	65.09 cd/klm

Other Applications

