

Model Sheet




Finish	 04 Black NCS 9000N
	 62 Green NCS S 3010-G20Y
	 23 Warm White test ral
LED temperature color	2700 K
Dimming	On/Off
Installation type	Plug-in
Materials	Head: Aluminium Base: Zinc Alloy Diffuser: PC- Polycarbonate Rods: Steel
Light source	1 x LED 4,48W 350mA 
LED	CRI>90 452.95 lm 100.66 2700 K
Driver	Constant Current 350 100~240 V V 50~60 Hz HZ
Remarks	Switch on the cable      
Application	Floor and Table Lamps
Packaging	1 Box 0.33 m x 0.265 m x 1.496 m Gross weighth 7.45 Net weighth 3.8 Vol. 0.1308

Lighting effect
Reading
High intensity, glare-free task lighting



Photometric Data

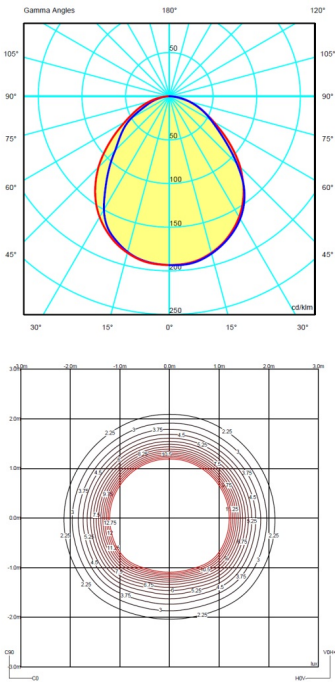

Efficiency	31.88 lm/W
Coordinate System	CG
Total Flux	192.18 lm
Maximum Value	80.54 cd

Other Applications

