

Centro Pendant

Pendants



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

Generate Date: Sat Oct 21 2023

DESCRIPTION

Centro, a sleek, circular fixture for both flushmount and pendant installation. With its slim profile and light-diffusing perforated edge, Centro possesses a subtle sophistication other fixtures don't.

MATERIALS

Powder coated steel, acrylic diffuser

PERFORMANCE

2400 lm

Power Consumption 30W

Luminaire Watts 30W

80lm/W

90 CRI

LED LIFESPAN

50k hours

CERTIFICATION

UL Listed

CE

Suitable for Damp Locations



NOTE ON IMAGERY

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

SUSPENSION

White 5" round flat canopy
Standard 72" cable
Standard Hang Height 65"
Minimum Hang Height 30"
Cable extension available (up to 420")
Field trimmable

PRODUCT DIMENSIONS

18" dia x 6 in H

PRODUCT WEIGHT

10 lbs / 4.6 kg

DIMENSIONAL WEIGHT

50 lbs

YOUR PRODUCT CODE

CTP-18- - - - -

Specification Logic

PRIMARY FINISH

Matte White	PC20
Silk Grey	PC25
Ochre Yellow	PC26
Matte Black	PC30
Vermilion	PC42
Custom Powder Coat	PCXX


COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
4000K (cool white)	40

DIMMING / CONTROL / INPUT

0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input"	0.1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input	1_TRIAC_120V

Drawings

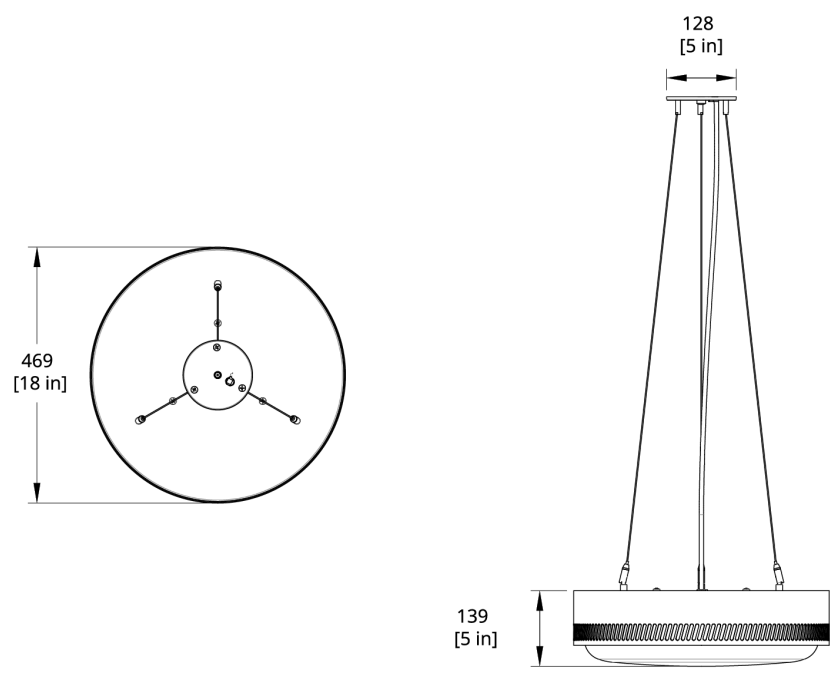

CTP-18 Centro Pendant Dimension