


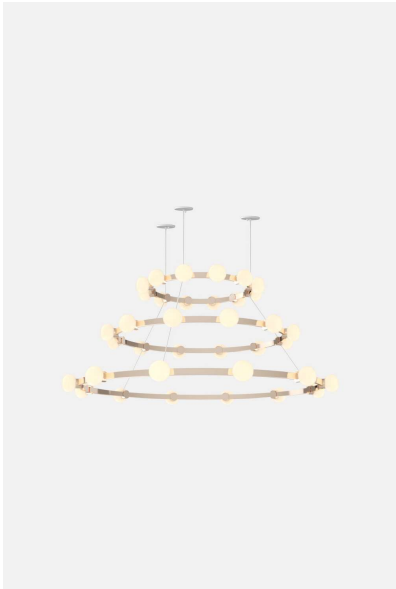

Cinema Triple Tiers

Chandeliers

YOUR PRODUCT CODE

C468-121212-PF14-27-1_TRIAC_120V

DESCRIPTION

The Cinema Chandelier makes a bold statement with minimal effort, featuring a simple circular frame in a rich metal or powder coated finish embellished by the warm glow of opal glass fixtures. Evocative of Old Hollywood’s charm, Cinema’s theatrical features are customizable to various compositions.

MATERIALS

Steel frame with satin opal globes

COLLECTION NOTES

Please contact a Sales rep to learn more for multi-tier configurations not available for online preview.

PRODUCT DIMENSIONS

96 in dia x 42 in H

PERFORMANCE

Delivered Lumens 18 Globes Est. 9000 lm | 36 Globes Est. 18000 lm
Power Consumption 18 Globes Est. 162W | 36 Globes Est. 324W
Luminous Efficacy Est. 62 lm/W
90 CRI

PATENT FILE NUMBER

Patent Number D825,090, D876,701, D851,806, D901,063, D1004180

SUSPENSION

White 5" round flat canopy x 3 (Contact your sales rep for more info)
Standard 72" cable and white power cord
Standard Hang Height 66"
Minimum Hang Height 6"
Cord/cable extension available (up to 150")
Field trimmable

CERTIFICATION

UL Listed
• Suitable for Damp Locations



LED LIFESPAN

50k hours

SPECIFICATION LOGIC

GLOBE

18 Globes (6 per Tier)	666
36 Globes (12 per Tier)	121212

PRIMARY FINISH

Matte White	PC20
Glacier	PC22
Cream White	PC24
Silk Grey	PC25
Ochre Yellow	PC26
Emerald	PC28
Matte Black	PC30
Breccia	PC31
Glimmer	PC32
Blue Gloss	PC36
Army Green	PC37
Brown Gold	PC40
Putty	PC41
Vermilion	PC42
Vert Clair	PC43
Buff	PC44
Dark Blue	PC46
Chalk Pink	PC60
Mottled Brass	PF11
Satin Nickel	PF12
Polished Chrome	PF13
Polished Copper	PF14
Warm Bronze	PF15
Polished Black Nickel	PF16
Satin Brass	PF17
Custom Powder Coated	PCXX
Fire Red	PC48
Luster	PC93

COLOR TEMPERATURE


2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40

DIMMING / CONTROL / INPUT

Low Voltage (Driver required, driver not included)	LV
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V

DRAWINGS

C468-121212 Cinema Chandelier Dimension

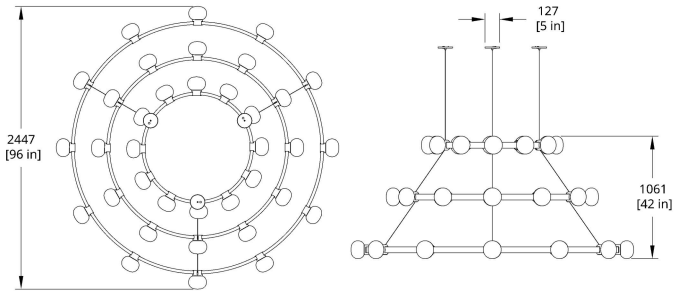

C468-666 Cinema Chandelier Dimension

