

Dimple Corded

Sconces



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



Generate Date: Thu Oct 19 2023

96" cord length with 2 prong plug. Optional toggle switch located 18" from bottom of fixture backplate.

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

DESCRIPTION

Originally designed in collaboration with Sister City, Dimple is a compact and flush-mounted sconce that casts a diffuse and soft, atmospheric light. It is cheekily named for the thick, domed circular diffuser embedded into its front face. Achieve a junction box free installation with corded plug-in capabilities for top RBW collections. Select from panel mount ready or fasten directly to the wall with the option to include a toggle switch along the cord. Achieve maximum versatility with minimal presence thanks to secure mounting technology.

MATERIALS

Cast solid glass, aluminum

COLLECTION NOTES

Luminaire lumens listed are for AC input Triac control. DC input are within photometry downloads. Each form of cast glass is unique. We review each to ensure they conform to ASTM standards, which includes the presence of small air bubbles within the glass.

PERFORMANCE

280 lumens (Frosted) | 240 lumens (White) | 120 lumens (Smoke) | 164 lumens (Amber)
Power Consumption 8.5W
Luminaire Watts 7.3W (AC Input)
38 lm/w (Frosted) | 33 lm/w (White) | 17 lm/w (Smoke) | 23 lm/w (Amber)
90 CRI

LED LIFESPAN

50k hour

CERTIFICATION

UL Listed
Suitable for Dry Locations Only
IP20



NOTE ON IMAGERY

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

Generate Date: Thu Oct 19 2023

PRODUCT DIMENSIONS

5" Dia. x 3" Depth

PRODUCT WEIGHT

3 lbs / 1.63 kg

DIMENSIONAL WEIGHT

2 lbs

YOUR PRODUCT CODE

DP-C- - - - -

Specification Logic

GLASS FINISH

Smoked	S2
Amber	S3
Frosted	S4
White Interior	S1

BACKPLATE FINISH

Natural Anodized	AA01
Black Anodized	AA04

COLOR TEMPERATURE


2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

CORDED PLUG-IN


Corded Plug-in (Back) / 120V Input	CBA_120V
Corded Plug-in (Bottom) / 120V Input	CBO_120V
Corded Plug-in (Bottom) w. Toggle Switch / 120V Input	CTS_120V

IP RATING

IP 20	IP20
-------	------

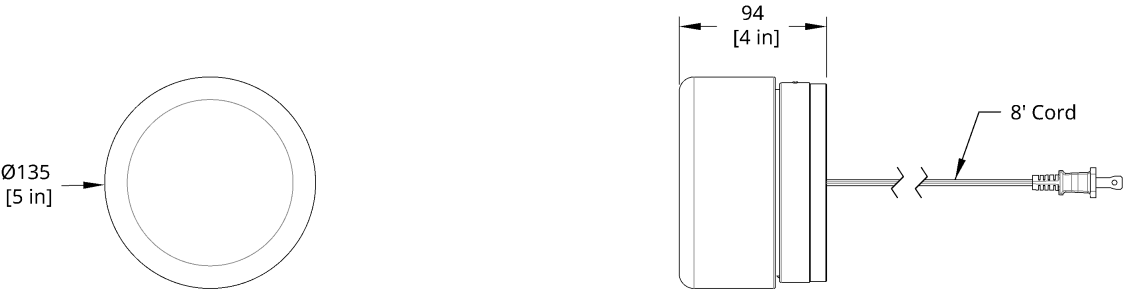

DP-C Dimple Corded Sconce (Cord Back)

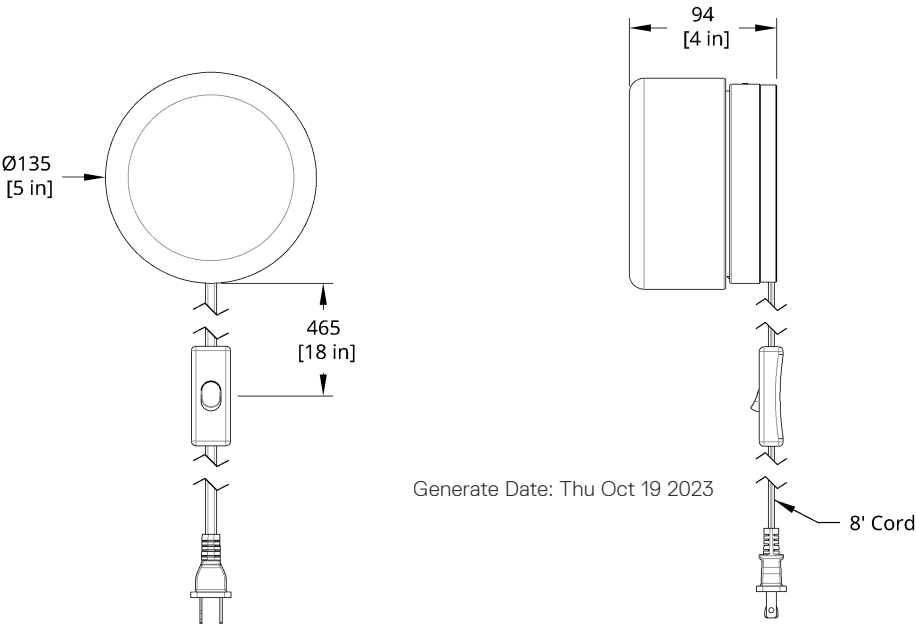

DP-C Dimple Corded Sconce (Cord Bottom w. Toggle Switch)