

Hoist Pendant

Pendants



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit
rbw.com

Generate Date: Thu Oct 19 2023

DESCRIPTION

Waterproof, minimalist, and available in a colorful variety of finishes, Hoist goes just about anywhere: indoors or outdoors, as a wall-mount or a pendant. With a range of sizes for its circular shade, make a statement large or small.

MATERIALS

Opal blown glass, spun steel.

COLLECTION NOTES

Cord grippers are sold as additional accessory items allowing you to swag the pendant to your desired install location.

PERFORMANCE

590 lm

Power Consumption 9W

Luminaire Watts 9W

70lm/W

90 CRI

LED LIFESPAN

50K hours

PATENT FILE NUMBER

Patent Number D861,955

CERTIFICATION

UL Listed

Suitable for Wet Locations

IP65



NOTE ON IMAGERY

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

SUSPENSION

- 5" round flat canopy comes in the same finish as pendant
- Standard 192" black cord with a plug
- Recommended Hang Height 66"
- Minimum Hang Height 6"
- Cord can be swagged using cable grips (sold separately)
- Field trimmable

PRODUCT DIMENSIONS

Small Shade 8" dia x 4" depth | Medium Shade 14" dia x 4" depth | Large Shade 21" dia x 4" depth. Please note the Large Glass has a 6" depth.

PRODUCT WEIGHT

2.5 lbs / 1.14 kg

DIMENSIONAL WEIGHT

No shade: 3 lbs | Small shade: 6 lbs | Medium shade: 8 lbs | Large shade: 14 lbs



YOUR PRODUCT CODE

HP- - - - - - - -



Specification Logic

SHADE

Bare Shade	0
Small Shade	8
Medium Shade	14
Large Shade	21

GLOBE

Small Glass Diffuser	A
Large Glass Diffuser	B

SHADE FINISH

Cream White	PC24
Matte Black	PC30
Blue Gloss	PC36
Vermilion	PC42
Custom Powder Coat	PCXX

COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35


DIMMING / CONTROL / INPUT

0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
Low Voltage (Driver required, driver not provided)	LV


IP RATING

IP 65	IP65
-------	------


Drawings

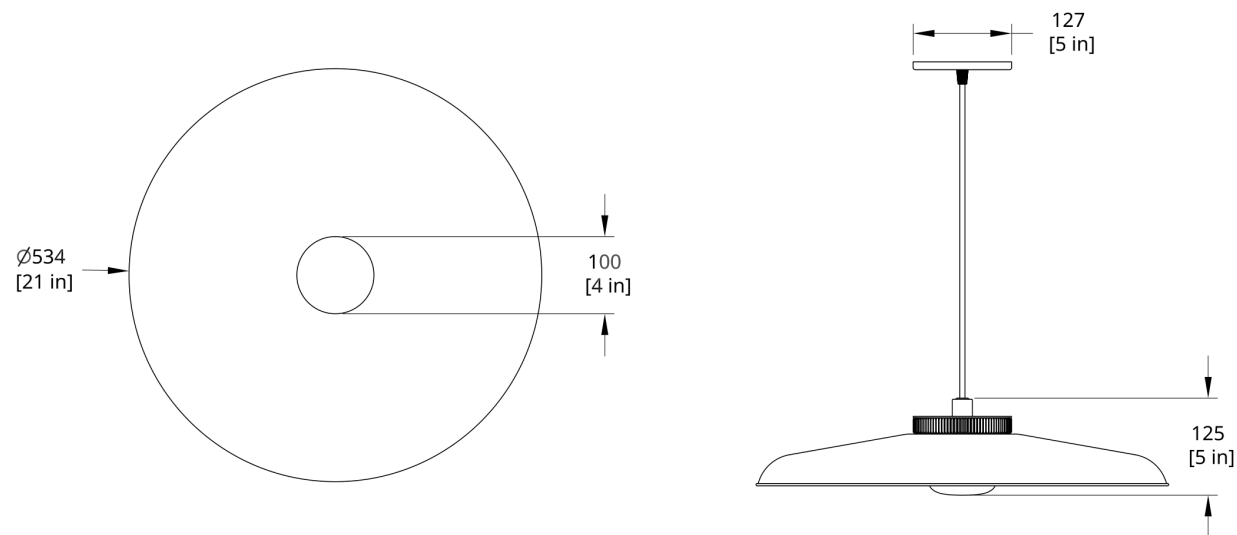


HP-21-A Hoist Pendant Small Diffuser Dimension

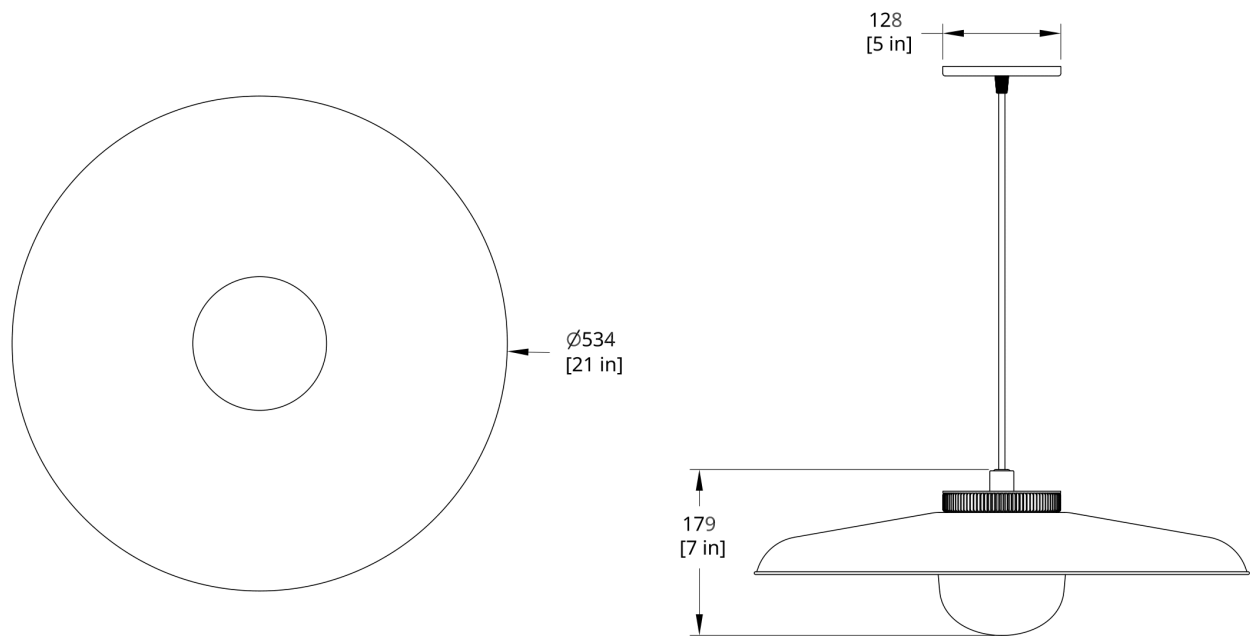


HP-21-B Hoist Pendant Large Diffuser Dimension

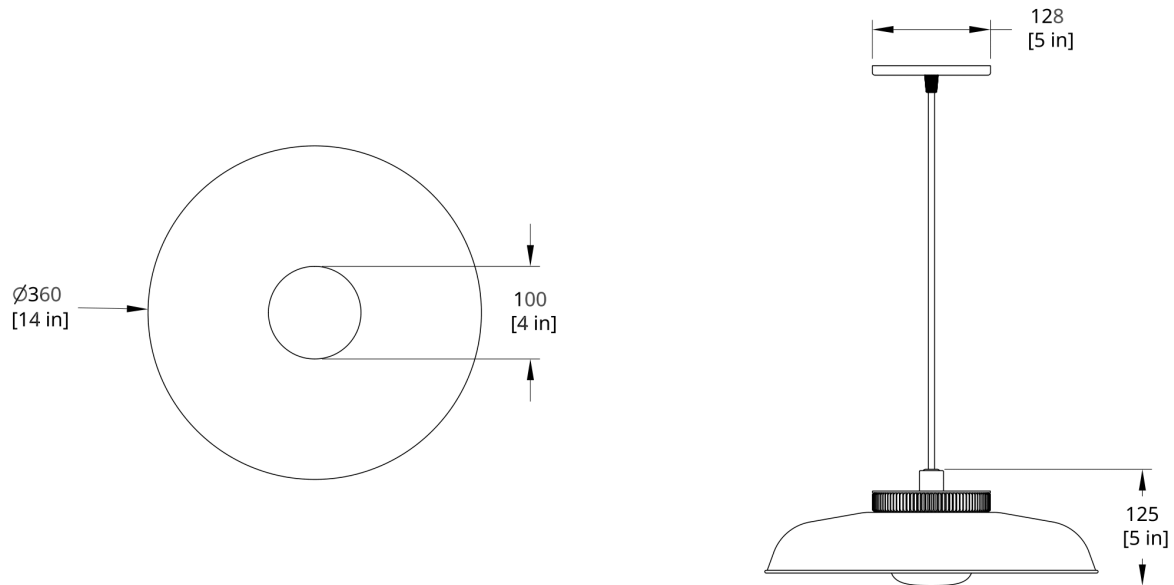


HP-14-A Hoist Pendant Small Diffuser Dimension

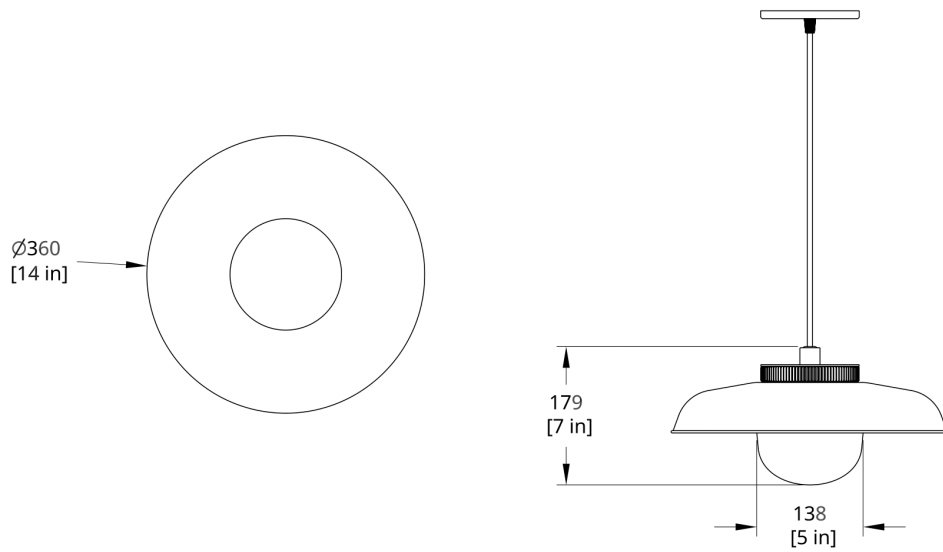

HP-8-B Hoist Pendant Large Diffuser Dimension

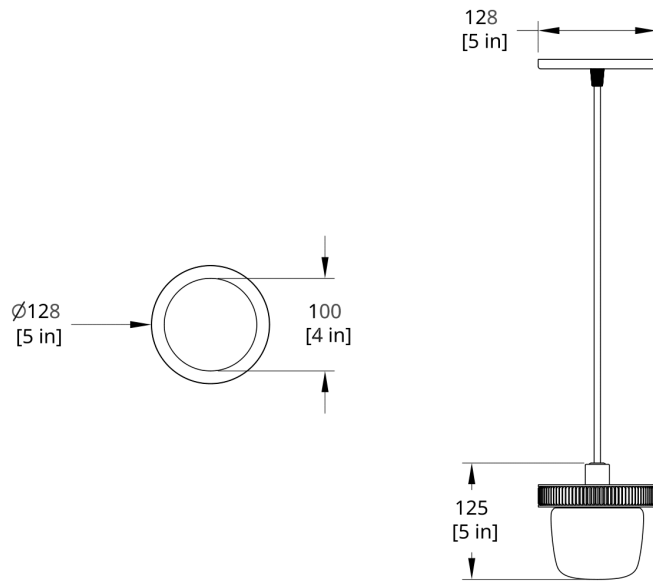

HP-0-A Hoist Pendant Bare Small Diffuser Dimension

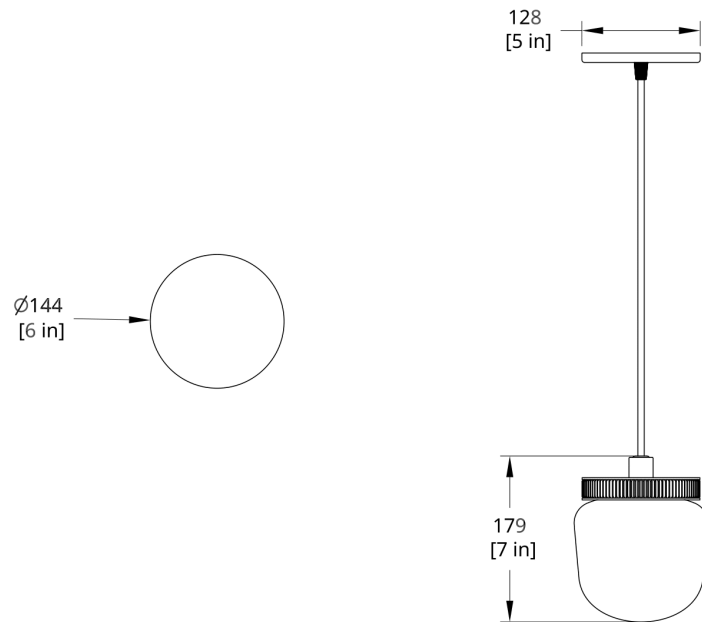

HP-0-B Hoist Pendant Bare Large Diffuser Dimension