



Latis Linear

Pendants

YOUR PRODUCT CODE

LS1-4-AA01-DASY-IASY-27-
0.1_10V_UNV

DESCRIPTION

Engineered with versatility in mind, Latis’s intelligent, fail-safe design easily adapts to a wide range of spaces, looks, and architectural conditions. Evocative of a structural I-beam, its deceptively minimalist profile packs robust performance capabilities into RBW’s new optic platform.

MATERIALS

Extruded aluminum, extruded acrylic lens

COLLECTION NOTES

In addition to the (2) fixed hang points, each linear run comes with (1) flexible, sliding hang point. Please let your sales rep know if your project requires additional sliding hang points. Looking for higher lumen output? We are happy to discuss how we can meet your project needs. For pricing on large quantity orders, please contact sales@rbw.com.

PRODUCT DIMENSIONS

4': 47 L x 3 W x 4 in H | 8': 91 L x 3 W x 4 in H | 12': 137 L x 3 W x 4 in H | 16': 181 L x 3 W x 4 in H

PRODUCT WEIGHT

7.5 lbs / 3.5 kg

PERFORMANCE

Delivered Lumens 4': 2,800 lm | 8': 5,700 lm | 12': 8,500 lm | 16': 11,400 lm
Power Consumption 4': 36W | 8': 72W | 12': 108W | 16': 144W
Luminous Efficacy 78.7 lm/W
90 CRI

PATENT FILE NUMBER

Patent Number D1000676, 202015830, 008211791-0001, GB90082117910001

SUSPENSION

White 5" round flat canopy per linear unit
Standard 72" cable
Standard Hang Height 66"
Minimum Hang Height 6"
Cable extension available (up to 150")
Field trimmable

SPECIFICATION LOGIC

LENGTH

Linear Run 4'	4
Linear Run 8'	8
Linear Run 12'	12
Linear Run 16'	16

PRIMARY FINISH

Natural Anodized	AA01
Black Anodized	AA04
Blue Anodized	AA07
Matte White	PC20
Chalk Pink	PC60
Custom Powder Coat	PCXX

DIRECT LIGHT

Asymmetric	DASY
Diffuse Lens	DDIF
Narrow Beam	DNB

INDIRECT LIGHT

Asymmetric	IASY
140 Batwing	IBAT
Diffuse Lens	IDIF
Narrow Beam	INB
No Indirect	INO

COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40

DIMMING / CONTROL / INPUT

0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input"	0.1_10V_UNV
---	-------------

DRAWINGS

CERTIFICATION


UL Listed




LED LIFESPAN

50k hours


LS1-4 Latis 4' Pendant Dimension

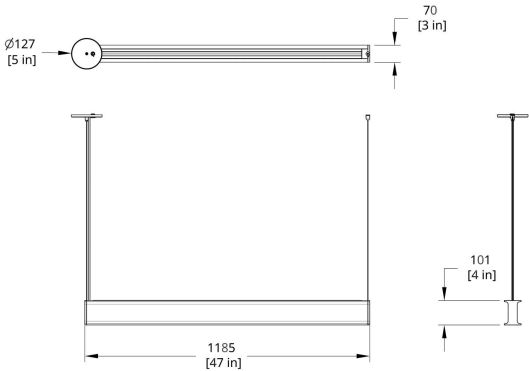


LS1-8 Latis 8' Pendant Dimension

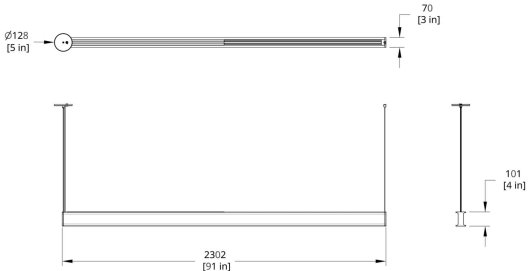


LS1-12 Latis 12' Pendant Dimension

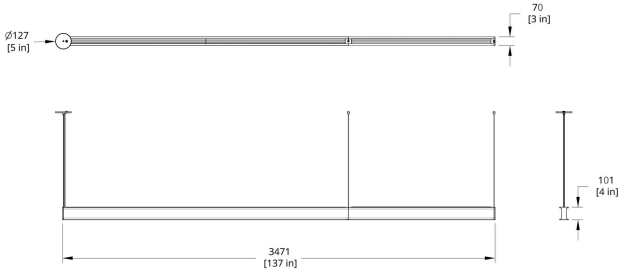

LS1-16 Latis 16' Pendant Dimension

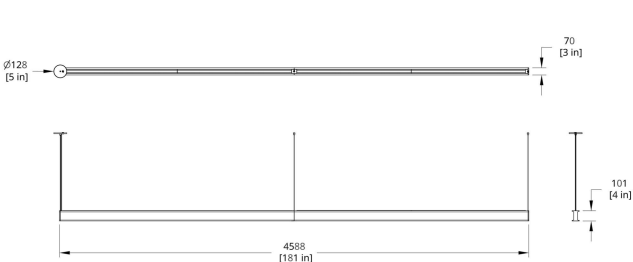

LS Latis Array 4' Dimension

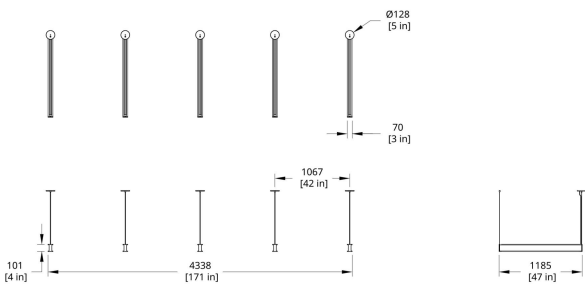

LS Latis Array 8' Dimension

