


Monocle

Sconces



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

Generate Date: Mon Oct 23 2023

DESCRIPTION

Monocle-a sleek, rotating sconce, with dimming control at the touch of a finger. Touch to cycle three levels of light, on, and off. Monocle's pleasantly round demeanor and touch dimmer makes it an ideal lamp for a bedside or workstation.

MATERIALS

Cast aluminum, steel, TPE cord, molded plastic

PERFORMANCE

340 lm

Power Consumption 8.9W

Luminaire Watts 8.9W

38.2 lm/W

90 CRI

LED LIFESPAN

50k hours

PATENT FILE NUMBER

Patent Number D900,373, 188813, 006641924-0001, GB90066419240001

CERTIFICATION

UL Listed

CE

Suitable for Damp Locations



NOTE ON IMAGERY

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

PRODUCT DIMENSIONS

6 W x 5 H x 4 in D

PRODUCT WEIGHT

2.2 lbs / 1 kg

DIMENSIONAL WEIGHT

4 lbs

YOUR PRODUCT CODE

MNT- - - - -

Specification Logic

PRIMARY FINISH

Matte White	PC20
Matte Black	PC30
Vert Clair	PC43
Buff	PC44
Custom Powder Coat	PCXX


COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

DIMMING / CONTROL / INPUT

0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
10% Dimming, Touch Control, 120V Input	10_TOUCH_120V
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
Low Voltage (Driver required, driver not included)	LV

Drawings

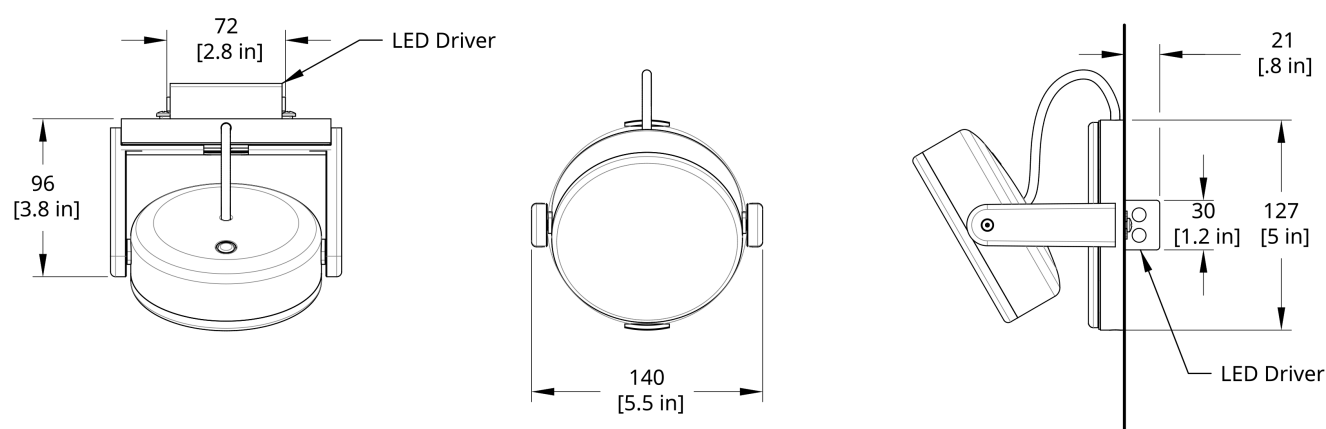

MNT Monocle Touch Sconce Dimension