

PERFORMANCE

Delivered Lumens 397 lm
 Power Consumption 9W
 Luminous Efficacy 44.3 lm/W

CERTIFICATION

ADA Compliant
 UL Listed
 • Suitable for Damp Locations



LED LIFESPAN

50k hours

Mori Sconce

Sconces

YOUR PRODUCT CODE

MS-2-27-10_TRIAC_120V

DESCRIPTION

This super simple, organic, glowing sconce is distinguished by its pared-down silhouette. A simple cross-wire frame is fully cocooned in woven threads, then sprayed with a matte lacquer finish. The resulting built-in shade emits a lantern-like, ambient light, ideally installed in multiples.

MATERIALS

Resilient webbed nylon skin over wire frame. Finished with durable matte lacquer.

PRODUCT DIMENSIONS

Shell 7 in dia x 4 in D | Seed 7 in dia x 4 in D | Pod 11 in dia x 4 in D

PRODUCT WEIGHT

1 lb / 0.5 kg

SPECIFICATION LOGIC

DIFFUSER STYLE

Shell	1
Seed	2
Pod	3

COLOR TEMPERATURE


2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

DIMMING / CONTROL / INPUT


0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
10% Dimming, TRIAC / Forward Phase Control, 120V Input	10_TRIAC_120V
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
Low Voltage (Driver required, driver not included)	LV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V

DRAWINGS

MS-2 Mori Seed Sconce Dimension

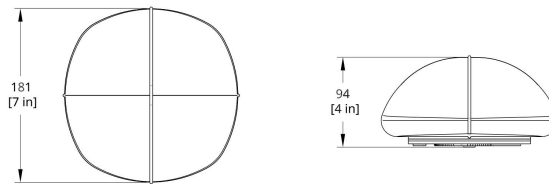

MS-3 Mori Pod Sconce Dimension

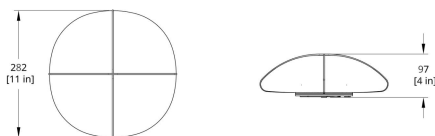

MS-1 Mori Shell Sconce Dimension

