


Pastille 1 Wayfind

Sconces



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com

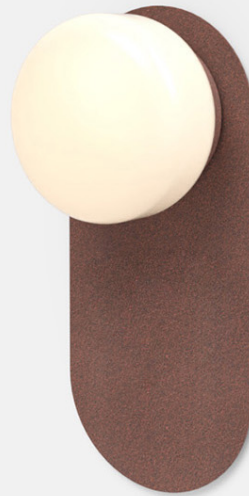

Download [Customization Spec](#) for Pastille Wayfind [here](#)

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

Generate Date: Fri Oct 20 2023

DESCRIPTION

Pastille's design echoes the Art Deco sensibilities of Old Hollywood. The collection offers mix-and-match options for custom installation, including either a droplet profile or faceted pattern for the glass globe, with various finishes for an accent ring or backplate.

MATERIALS

Opal glass, aluminum or steel

COLLECTION NOTES

Custom hand painting and braille solutions are available for the Pastille collection. Inquire with sales@rbw.com.

PERFORMANCE

430 lm

Power Consumption 7.5W

Luminaire Watts 7.5W

57.5 lm/W

90 CRI

LED LIFESPAN

50k hours

PATENT FILE NUMBER

Patent Number D935,085,187451, 006433652-0001, GB90064336520002

CERTIFICATION

ADA Compliant

UL Listed

Suitable for Wet Locations

Suitable for Damp Locations

IP20

IP65



NOTE ON IMAGERY

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

PRODUCT DIMENSIONS

13 L x 6 W x 4 in D

PRODUCT WEIGHT

1 lbs / 0.5 kg

DIMENSIONAL WEIGHT

7 lbs

YOUR PRODUCT CODE

PAS-1W- - - - - - -

Specification Logic

DIFFUSER STYLE (GLOBE)

Droplet	D
Faceted	F
Ribbed	R

BACKPLATE FINISH

Matte White	PC20
Matte Black	PC30
Silk Grey	PC25
Breccia	PC31
Vermilion	PC42
Polished Chrome	PF13
Satin Brass	PF17
Custom Powder Coated	PCXX

COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35


DIMMING / CONTROL / INPUT

Low Voltage (Driver required, driver not included)	LV
10% Dimming, TRIAC / Forward Phase Control, 120V Input	10_TRIAC_120V
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV

IP RATING

IP 20	IP20
IP 65	IP65

Drawings

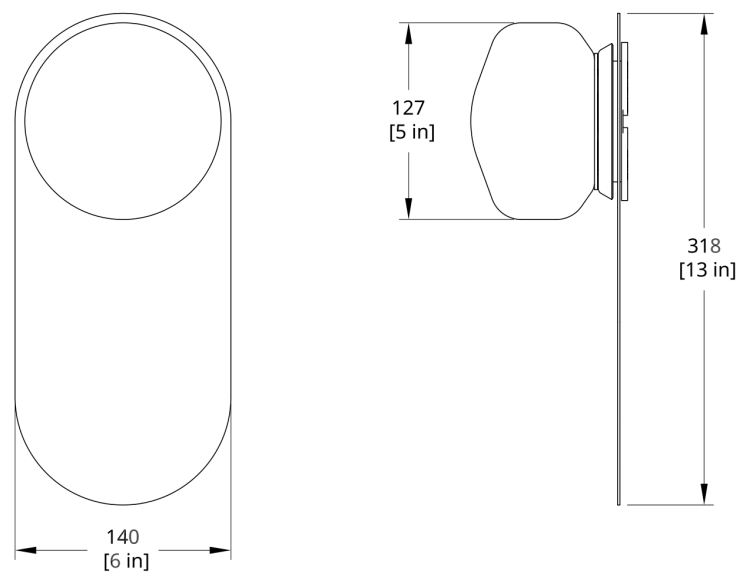

PAS-1W Pastille Wayfind Sconce Dimension