


# Pastille 3 Vanity

Sconces



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
sales@rbw.com

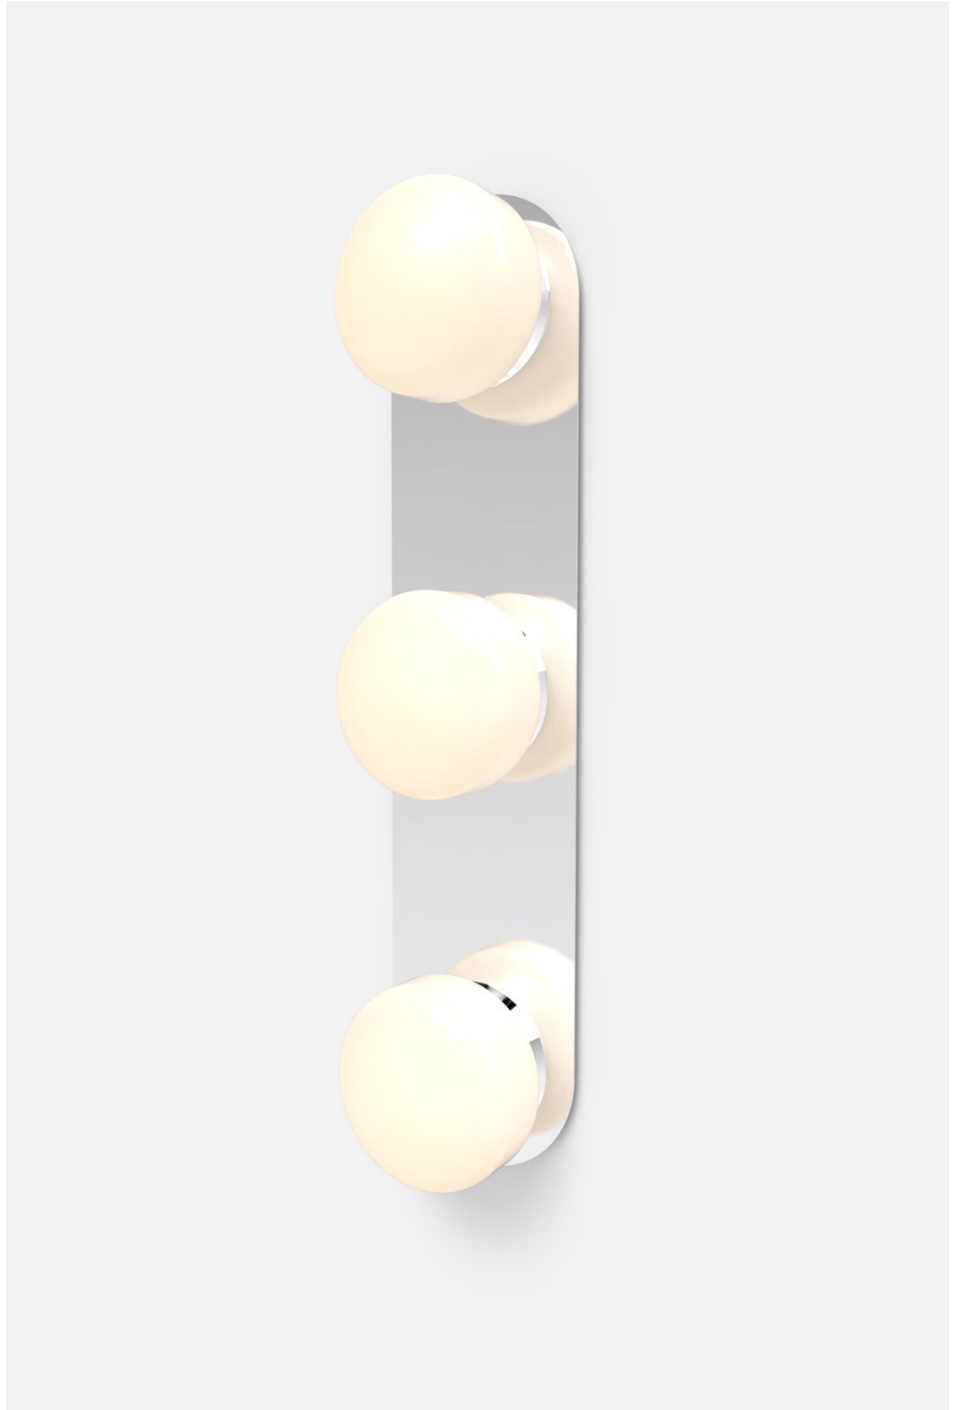

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit  
[rbw.com](http://rbw.com)

Generate Date: Fri Oct 20 2023

**DESCRIPTION**

Pastille's design echoes the Art Deco sensibilities of Old Hollywood. The collection offers mix-and-match options for custom installation, including either a droplet profile or faceted pattern for the glass globe, with various finishes for an accent ring or backplate.

**MATERIALS**

Opal glass, aluminum or steel

**COLLECTION NOTES**

Custom hand painting and braille solutions are available for the Pastille collection. Inquire with [sales@rbw.com](mailto:sales@rbw.com).

**PERFORMANCE**

1270 lm

Power Consumption 22W

Luminaire Watts 22W

59 lm/W

90 CRI

**LED LIFESPAN**

50k hours

**PATENT FILE NUMBER**

Patent Number D935,085,187451, 006433652-0001, GB90064336520002

**CERTIFICATION**

ADA Compliant

UL Listed

Suitable for Wet Locations

Suitable for Damp Locations

IP20

IP65



**NOTE ON IMAGERY**

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

**PRODUCT DIMENSIONS**

24 L x 6 W x 4 in D

**PRODUCT WEIGHT**

2.5 lbs / 1.14 kg

**DIMENSIONAL WEIGHT**

15 lbs

---

**YOUR PRODUCT CODE**

**PAS-3V-**

---

Specification Logic

**DIFFUSER STYLE (GLOBE)**

---

Droplet	DDD
Faceted	FFF
Ribbed	RRR

**BACKPLATE FINISH**

---

Matte White	PC20
Matte Black	PC30
Silk Grey	PC25
Breccia	PC31
Vermilion	PC42
Custom Powder Coated	PCXX
Polished Chrome	PF13
Satin Brass	PF17

**COLOR TEMPERATURE**

---

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

**DIMMING / CONTROL / INPUT**

---


0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
Low Voltage (Driver required, driver not included)	LV
10% Dimming, TRIAC / Forward Phase Control, 120V Input	10_TRIAC_120V
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V

**IP RATING**

---

IP 20	IP20
IP 65	IP65

Drawings

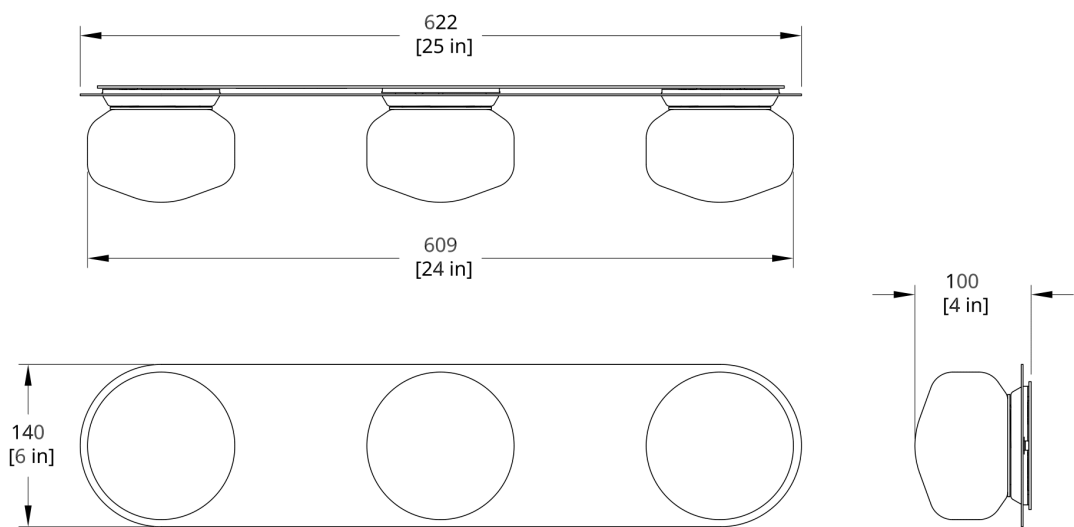

PAS-3V Pastille Vanity Sconce Dimension