


Phase

Sconces



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

Generate Date: Mon Oct 23 2023

DESCRIPTION

Phase recalls a quarter of the lunar cycle, Earth's moon half lit. Half of this wall-mounted, cast-glass spherical sconce emits a bright light, while the other half is coated in a chrome finish for reduced output.

MATERIALS

Cast glass, anodized aluminum

COLLECTION NOTES

Each form of cast glass is unique. We review each to ensure they conform to ASTM standards, which includes the presence of small air bubbles within the glass.

PERFORMANCE

Estimate 640 lm

Power Consumption 8.5W

Luminaire Watts 8.5W

90 CRI

LED LIFESPAN

50k hours

PATENT FILE NUMBER

Patent Number D868,340

CERTIFICATION

ADA Compliant

UL Listed

Suitable for Wet Locations

Suitable for Damp Locations

IP20

IP65



NOTE ON IMAGERY

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

PRODUCT DIMENSIONS

6 dia x 4 in Depth







PRODUCT WEIGHT

2.5 lbs / 1.14 kg

DIMENSIONAL WEIGHT

4 lbs

YOUR PRODUCT CODE

RGP-1-  -  -  -  -  - 

Specification Logic

BACKPLATE FINISH

| | |
|----------------|------|
| Black Anodized | AA04 |
|----------------|------|

COLOR TEMPERATURE

| | |
|-----------------------|----|
| 2700K (warm white) | 27 |
| 3000K (soft white) | 30 |
| 3500K (neutral white) | 35 |

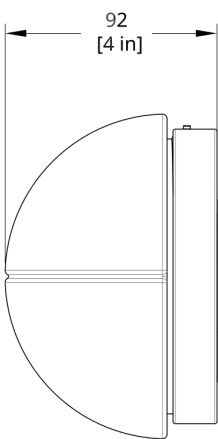
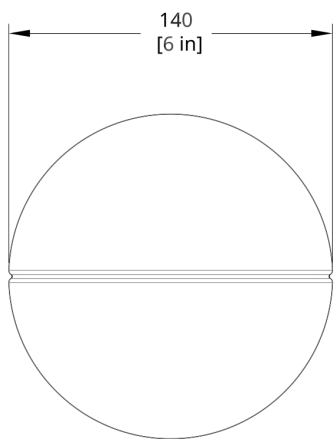
DIMMING / CONTROL / INPUT

| | |
|---|---------------|
| Low Voltage (Driver required, driver not included) | LV |
| 1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External) | 1_10V_UNV |
| 1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External) | 1_TRIAC_120V |
| 10% Dimming, TRIAC / Forward Phase Control, 120V Input | 10_TRIAC_120V |
| 0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External) | 0.1_10V_UNV |

IP RATING

| | |
|-------|------|
| IP 20 | IP20 |
| IP 65 | IP65 |

Drawings



RGP Phase Sconce Dimension