



# Print Flush Mount

Ceiling Flush Mounts



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
sales@rbw.com

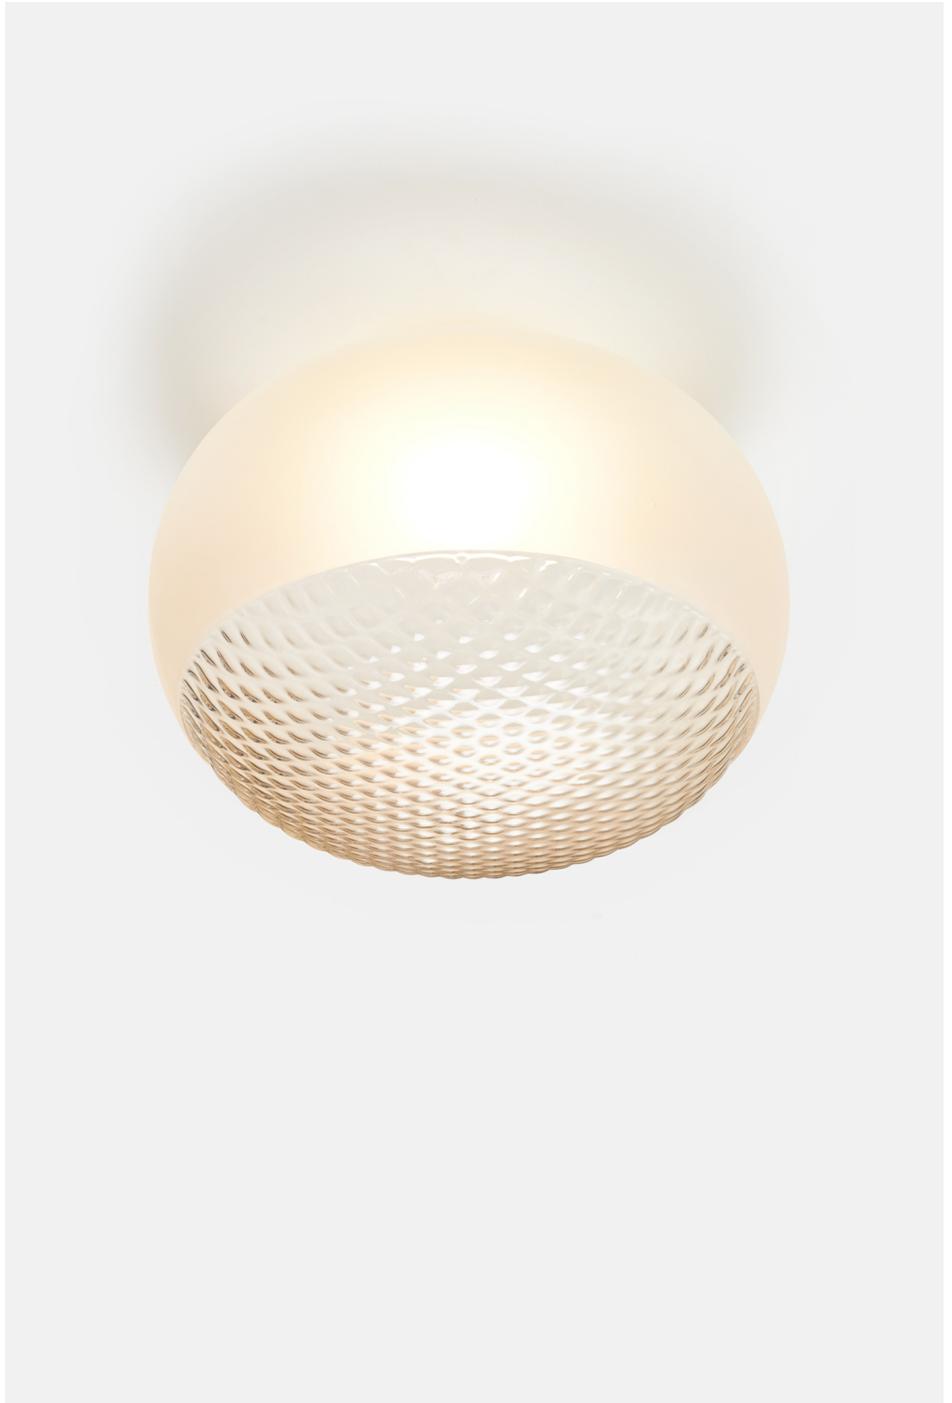

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

Generate Date: Fri Oct 20 2023

**DESCRIPTION**

With high-performance LEDs enclosed in a unique, prismatic shade, Print is the classic globe, elevated. Its striking surface, achieved by acclaimed designer Sylvain Willenz, is imprinted with a diamond texture that creates an understated, sparkling play of light.

**MATERIALS**

Glass, PET Plastic, Aluminum

**COLLECTION NOTES**

Print sconce & flush mount with small globe are ADA compliant, the fixtures with large globes are not.

**PERFORMANCE**

Large Glass Globe: 1337 lm | Large PET Globe: 1449 lm | Small Glass Globe: 394 lm | Small PET Globe: 576 lm

Large 19.7W | Small 8W

8W

Large Glass Globe 67.4 lm/W | Large PET Globe 73.1 lm/W | Small Glass Globe 49.6 lm/W | Small PET Globe 72.4 lm/W

Minimum 90 CRI

**LED LIFESPAN**

50k hours

**PATENT FILE NUMBER**

Patent Number 008636773-0001, 008636773-0001, 6151348, 6151349, 6151350

**CERTIFICATION**

ADA Compliant

UL Listed

Suitable for Wet Locations

IP65



**NOTE ON IMAGERY**

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

**PRODUCT DIMENSIONS**

Large Globe: 16 D x 12 in H | Small Globe: 8 D x 4 in H

**PRODUCT WEIGHT**

6.5 lbs / 3 kg

**DIMENSIONAL WEIGHT**

Large: 45.5 lbs | Small: 18.6 lbs

---

**YOUR PRODUCT CODE**

**PRFM-**  -  -  -  -  -  -

---

Specification Logic

**GLOBE**

---

Small Globe	A
Large Globe	B

**DIFFUSER FINISH**

---

Clear/Frosted Glass	CF
Frosted PET	P2

**MODULE FINISH**

---

Matte White	PC20
-------------	------

**COLOR TEMPERATURE**

---



2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40

**DIMMING / CONTROL / INPUT**



---

0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
Low Voltage (Driver required, driver not included)	LV
1% Dimming, 0-10V Control, 120V or 277V "Universal Input"	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input	1_TRIAC_120V

# Drawings

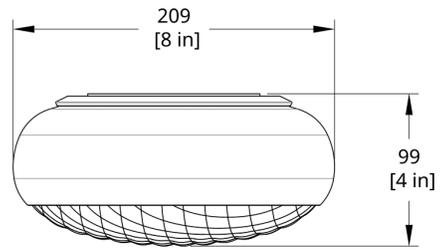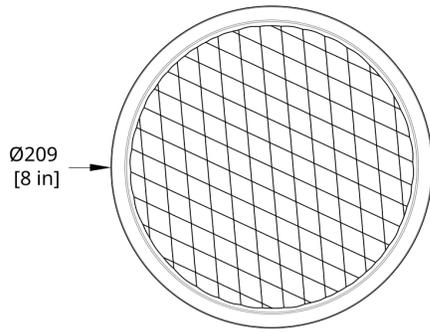

PRFM-A Print Flush Mount Small

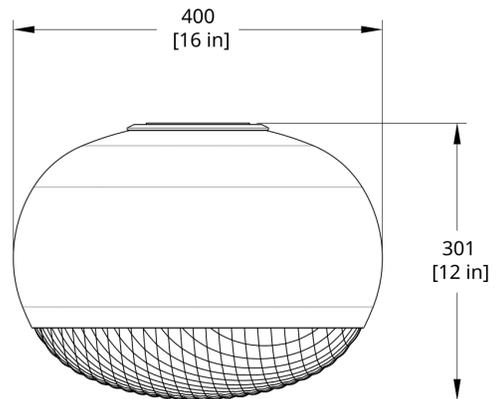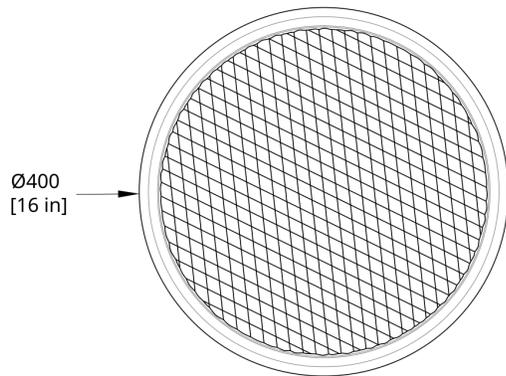

PRFM-B Print Flush Mount Large