

# Print Pendant

Pendants



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
[sales@rbw.com](mailto:sales@rbw.com)



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

Generate Date: Fri Oct 20 2023

#### DESCRIPTION

With high-performance LEDs enclosed in a unique, prismatic shade, Print is the classic globe, elevated. Its striking surface, achieved by acclaimed designer Sylvain Willenz, is imprinted with a diamond texture that creates an understated, sparkling play of light.

#### MATERIALS

Glass, PET Plastic, Aluminum

#### COLLECTION NOTES

Print sconce & flush mount with small globe are ADA compliant, the fixtures with large globes are not.

#### PERFORMANCE

Glass Globe: 1337 lm | PET Globe: 1449 lm

19.7W

8W

Glass Globe 67.4 lm/W | PET Globe 73.1 lm/W

Minimum 90 CRI

#### LED LIFESPAN

50k hours

#### PATENT FILE NUMBER

Patent Number 008636773-0001, 008636773-0001, 6151348, 6151349, 6151350

#### CERTIFICATION

ADA Compliant

UL Listed

Suitable for Wet Locations

IP65



**NOTE ON IMAGERY**

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

**SUSPENSION**

- White 7" round deep canopy
- Standard 72" cable or white stem
- Standard Hang Height 66"
- Minimum Hang Height 6" for cable or 14" for stem
- Cable and stem extension available (up to 150")
- Field trimmable

**PRODUCT DIMENSIONS**

Large Globe: 16 D x 12 in H

**PRODUCT WEIGHT**

8.3 lbs / 3.8 kg

**DIMENSIONAL WEIGHT**

45.5 lbs

---

**YOUR PRODUCT CODE**

PRP--------

---

Specification Logic

**MOUNTING**

---

Cable Suspension	CS
Stem Mount	ST

**GLOBE**

Large Globe

B

**DIFFUSER FINISH**

Clear/Frosted Glass

CF

Frosted PET

P2

**MODULE FINISH**

Matte White

PC20

**COLOR TEMPERATURE**

2700K (warm white)

27

3000K (soft white)

30

3500K (neutral white)

35

4000K (cool white)

40

**DIMMING / CONTROL / INPUT**

Low Voltage (Driver required, driver not included)

LV

1% Dimming, 0-10V Control, 120V or 277V "Universal Input"

1\_10V\_UNV



0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)

0.1\_10V\_UNV



1% Dimming, TRIAC / Forward Phase Control, 120V Input

1\_TRIAC\_120V

Drawings

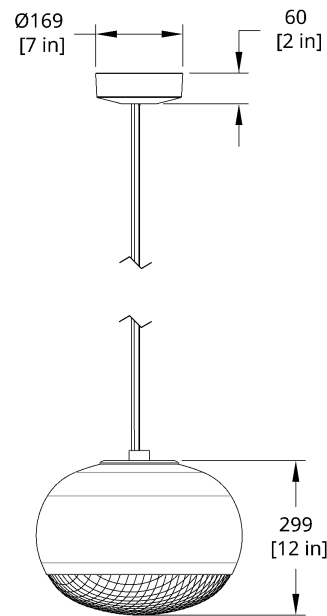

PRP-CS-B Print Pendant Cable Suspension

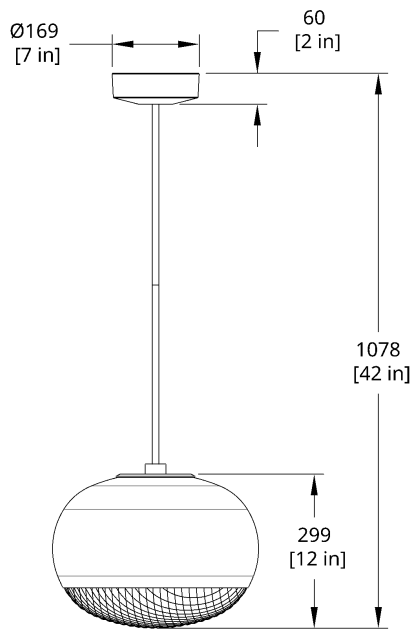

PRP-ST-B Print Pendant Stem Mount