



# Queue Pendant Multi

Pendants

## YOUR PRODUCT CODE

QP-132-DDIF\_INO-AA02-27-  
1\_TRIAC\_120V

### DESCRIPTION

Queue is a linear LED pendant system with limitless potential, designed for flexible installation and an inviting presence. These modular bars of light connect via linear sliding joints and hang from stainless steel wire loops, allowing for custom compositions tailored to the needs of the space.

### MATERIALS

Textured PMMA lens, anodized aluminum body.

### COLLECTION NOTES

Additional linear run can be specified.  
Download Tech Pack to specify alternating light direction per segment with our sales rep. These configurations are not available via online preview. White Gold AA-02 requires minimum 20 business day lead time.

### PRODUCT DIMENSIONS

44" Run: 44.5 L x 3 W x 5 in H

### PRODUCT WEIGHT

8 lbs / 3.6 kg

### PERFORMANCE

Delivered Lumens 3900 lm for 44" run direct  
Power Consumption 45W  
Luminous Efficacy 86 lm/W  
90 CRI

### SUSPENSION

White 5" round flat canopy  
Standard 72" cable  
Standard Hang Height 66"  
Minimum Hang Height 12"  
Cable extension available (up to 420")  
Field trimmable

### CERTIFICATION

UL Listed  
• Suitable for Damp Locations



### LED LIFESPAN

50k hours

## SPECIFICATION LOGIC

### LENGTH

|      |     |
|------|-----|
| 44"  | 44  |
| 88"  | 88  |
| 132" | 132 |
| 176" | 176 |

### DIFFUSER STYLE (DIRECTION)

|                   |           |
|-------------------|-----------|
| Direct / Indirect | DDIF_IDIF |
| Direct            | DDIF_INO  |
| Indirect          | DNO_IDIF  |

### PRIMARY FINISH

|                      |      |
|----------------------|------|
| Natural Anodized     | AA01 |
| White Gold Anodized  | AA02 |
| Black Anodized       | AA04 |
| Custom Anodized      | AAXX |
| Custom Powder Coated | PCXX |

### COLOR TEMPERATURE


|                       |    |
|-----------------------|----|
| 2700K (warm white)    | 27 |
| 3000K (soft white)    | 30 |
| 3500K (neutral white) | 35 |
| 4000K (cool white)    | 40 |

### DIMMING / CONTROL / INPUT


|                                                             |              |
|-------------------------------------------------------------|--------------|
| 1% Dimming, 0-10V Control, 120V or 277V "Universal Input"   | 1_10V_UNV    |
| 1% Dimming, TRIAC / Forward Phase Control, 120V Input       | 1_TRIAC_120V |
| 0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" | 0.1_10V_UNV  |

## DRAWINGS


QP-176 Queue Pendant Dimension (Direct Indirect)

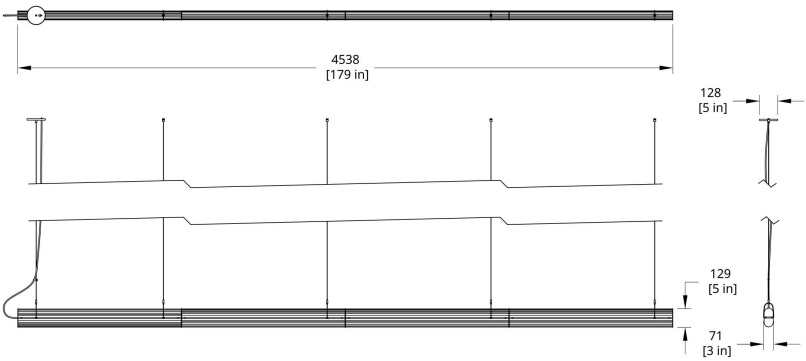

QP-132 Queue Pendant Dimension (Direct Indirect)

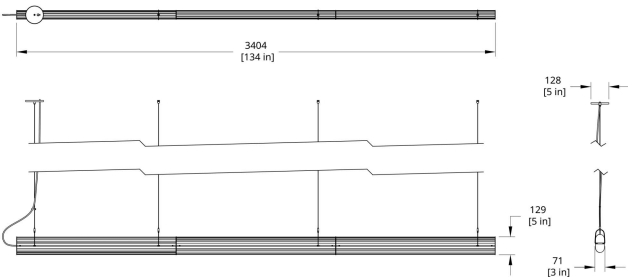

QP-88 Queue Pendant Dimension (Direct Indirect)

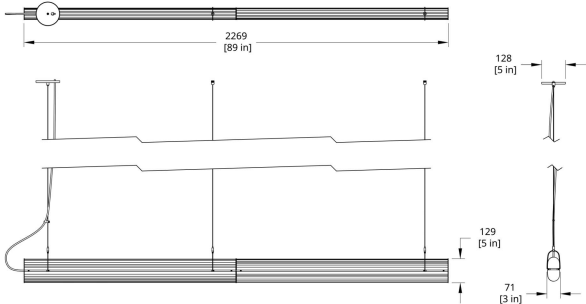

QP-44 Queue Pendant Dimension (Direct Indirect)

