


# Radiant Square

Sconces



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
[sales@rbw.com](mailto:sales@rbw.com)



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

Generate Date: Fri Oct 20 2023

## DESCRIPTION

Diffusing a soft halo of light, Radiant pairs minimalist design with robust LED output and the texture and warmth of solid, sustainably harvested-wood. Custom options for the sconce's simple wooden shade include two shapes, three sizes, and four finishes, allowing for rhythmic color and pattern compositions when installed in groups.

## MATERIALS

Ethical sourced solid wood, plastic diffuser, metallic powder coat aluminum base.

## PERFORMANCE

433 lm

Power Consumption 8W

Luminaire Watts 8W

54.1 lm/W

95 CRI

## LED LIFESPAN

50k hours

## CERTIFICATION

UL Listed

Suitable for Damp Locations

IP20



## NOTE ON IMAGERY

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

## PRODUCT DIMENSIONS

Large: 12 in Dia x 4 in Depth | Medium: 10 in Dia x 4 in Depth | Small: 8 in Dia x 4 in Depth

Generate Date: Fri Oct 20 2023

**PRODUCT WEIGHT**

Large: 3.46 lbs / 1.6 kg | Medium: 2.48 lbs / 1.1 kg | Small: 1.95 lbs / 0.9 kg

**DIMENSIONAL WEIGHT**

3 lb

YOUR PRODUCT CODE

RD-SQ--------

Specification Logic

SIZE	
Large 12"	L
Medium 10"	M
Small 8"	S

WOOD FINISH	
White Oak	WF01
Ebonized Oak	WF02
White	WF04
Tzalam / Caribbean Walnut	WF05

FINISH MODULE	
Matte White	PC20
Matte White	PC20

**COLOR TEMPERATURE**

---

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40

**DIMMING / CONTROL / INPUT**

---


Low Voltage (Driver required, driver not included)	LV
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V

**IP RATING**


---

IP 20	IP20
-------	------



Drawings

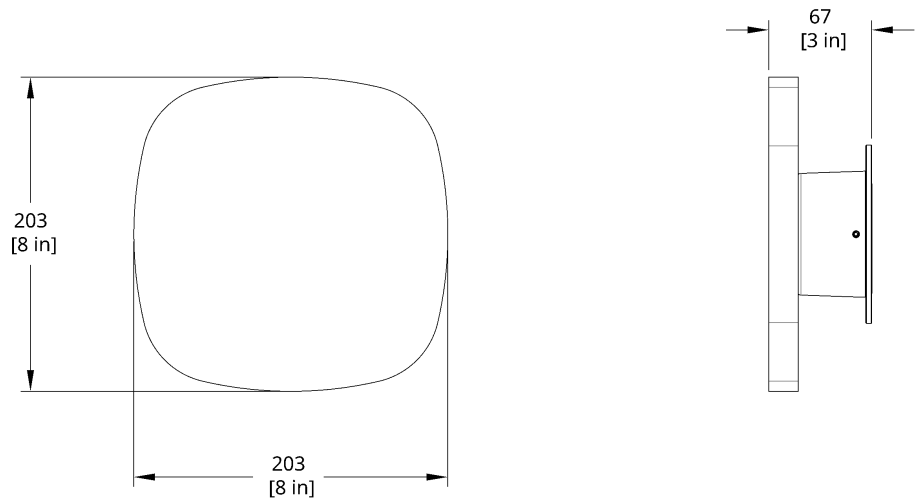

RD-SQ-S Radiant Square Small

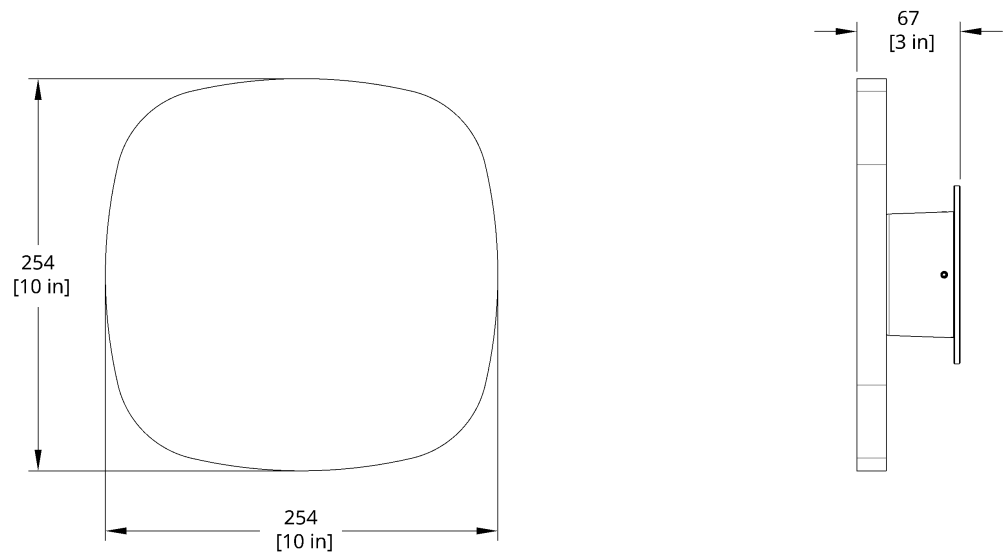

RD-SQ-M Radiant Square Medium

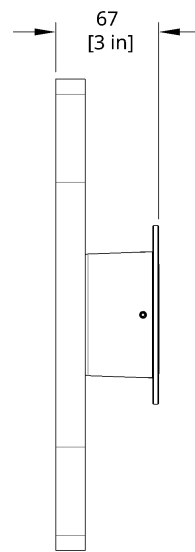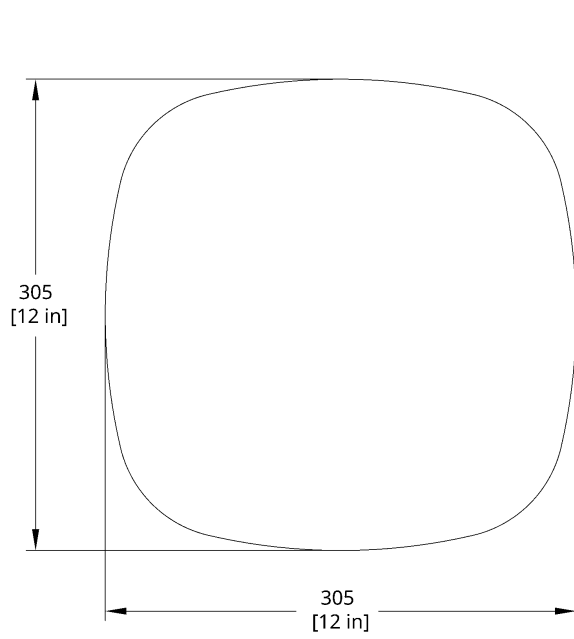

RD-SQ-L Radiant Square Large