


Ripple Flush Mount

Ceiling Flush Mounts



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com

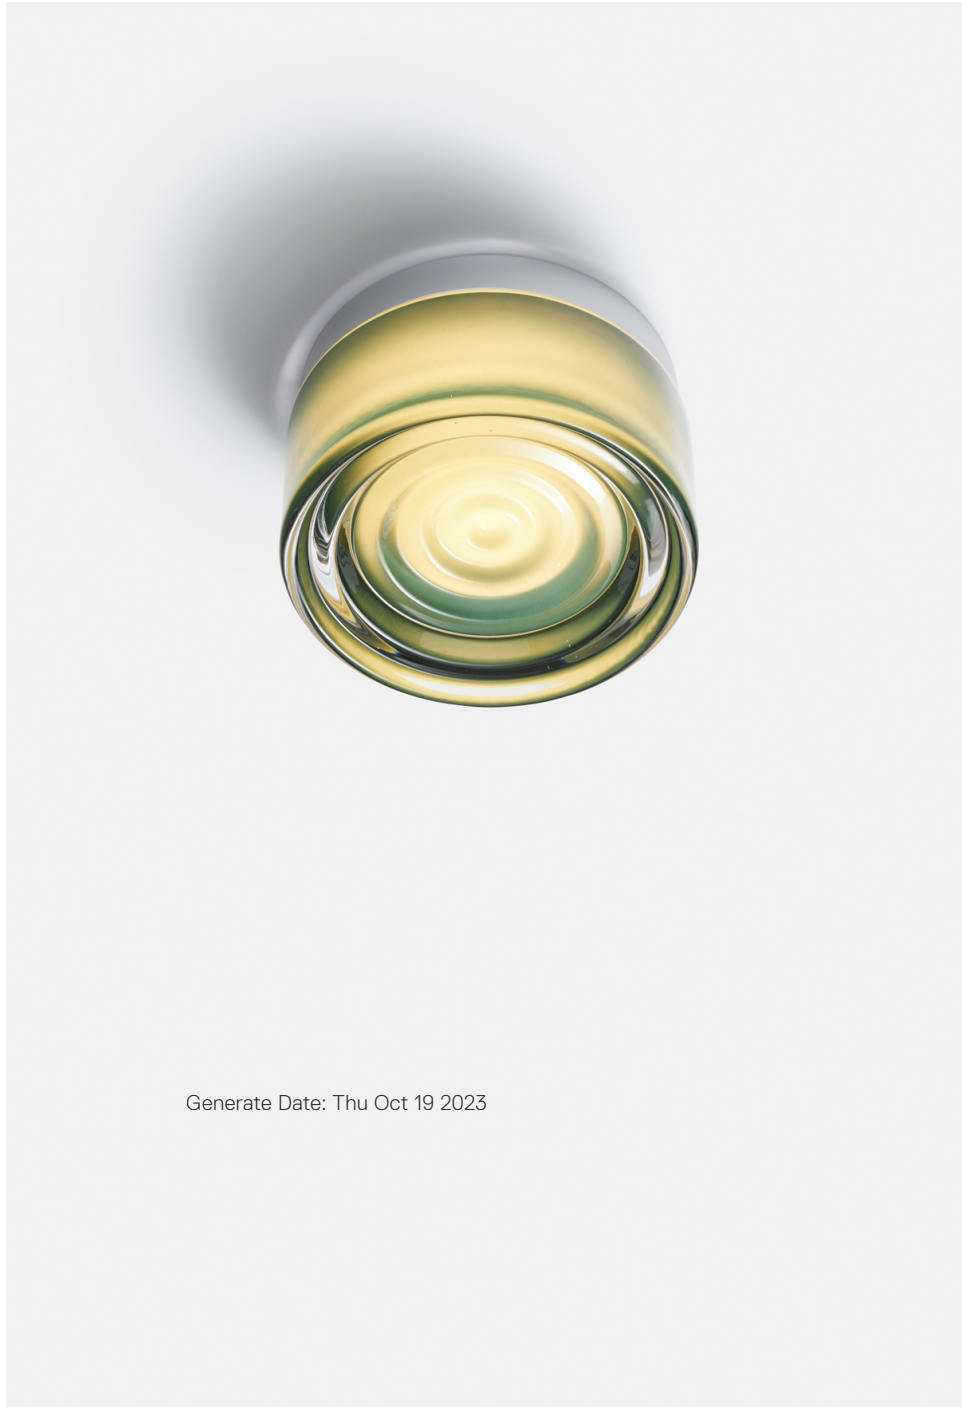

Generate Date: Thu Oct 19 2023

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

DESCRIPTION

Meet Ripple, a new sconce and flush mount collection distinguished by its substantial solid glass shade. A unique texture of raised, concentric rings brings to mind ripples coursing along the surface of water.

MATERIALS

Cast solid glass, aluminum

COLLECTION NOTES

Luminaire lumens listed are for DC input. AC input are within photometry downloads. Each form of cast glass is unique. We review each to ensure they conform to ASTM standards, which includes the presence of small air bubbles within the glass.

PERFORMANCE

697 lm (Frosted) | 390 lm (White) | 341 lm (Smoked) | 66 lm (Copper) | 414 lm (Jade)
Power Consumption 10W
69.1 lm/W (Frosted) | 38.7 lm/W (White) | 33.8 lm/W (Smoked) | 6.5 lm/W (Copper) | 41.1 lm/W (Jade)
90 CRI

LED LIFESPAN

50k hours

CERTIFICATION

ADA Compliant
UL Listed
Suitable for Wet Locations
IP65



NOTE ON IMAGERY

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

Generate Date: Thu Oct 19 2023

PRODUCT DIMENSIONS

5" Dia. x 3.3" Depth

PRODUCT WEIGHT

3.5 lbs / 2 kg

DIMENSIONAL WEIGHT

3 lbs

YOUR PRODUCT CODE

Specification Logic

GLASS FINISH

| | |
|-----------------|-----|
| White Interior | S20 |
| Smoked | S21 |
| Frosted | S22 |
| Copper Exterior | S23 |
| Jade | S24 |

BACKPLATE FINISH

| | |
|------------------|------|
| Natural Anodized | AA01 |
| Black Anodized | AA04 |

COLOR TEMPERATURE


| | |
|-----------------------|----|
| 2700K (warm white) | 27 |
| 3000K (soft white) | 30 |
| 3500K (neutral white) | 35 |

DIMMING / CONTROL / INPUT

| | |
|---|---------------|
| 0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External) | 0.1_10V_UNV |
| 1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External) | 1_10V_UNV |
| 1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External) | 1_TRIAC_120V |
| 10% Dimming, TRIAC / Forward Phase Control, 120V Input | 10_TRIAC_120V |
| Low Voltage (Driver required, driver not included) | LV |

IP RATING

| | |
|-------|------|
| IP 65 | IP65 |
|-------|------|

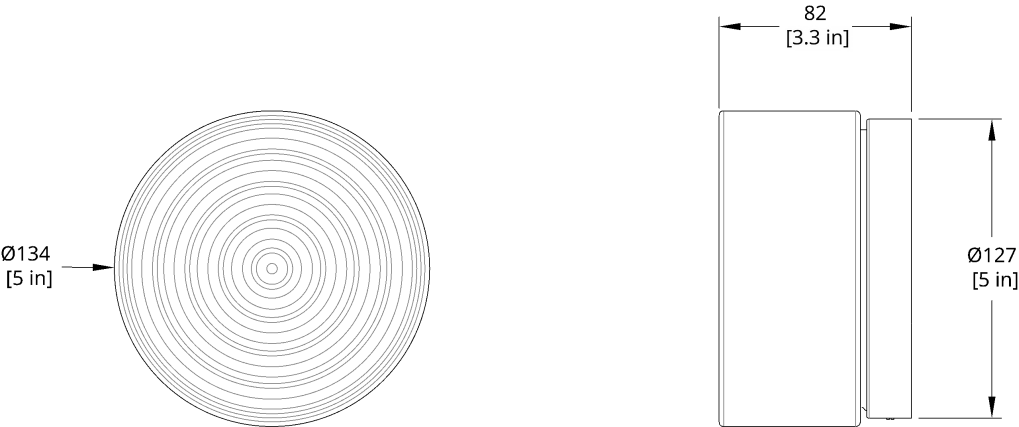

RP-WS Ripple Sconce Dimension (Rotate 90 degrees for flush mount version)