

Vitis 5

Chandeliers



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



Vitis may be provided with longer or shorter cord segments upon request.

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

Generate Date: Mon Oct 23 2023

DESCRIPTION

Designed so that no two installations are exactly alike, Vitis, is a draped modular statement chandelier with endless customizable possibilities. Its flexible, translucent cables accommodate blown-glass orbs at various heights, giving the appearance of lights floating in space.

MATERIALS

Blown glass globes, anodized aluminum clasps, woven cord

COLLECTION NOTES

Vitis comes with 120 in/ 3048mm cord between globes. Custom length available upon request.
Power enclosure comes with every order.

PERFORMANCE

905 lm (Ivory); 715 lm (Smoke)
Power Consumption 7W
Luminaire Watts 32.5W
Per Globe - 28 lm/W (Ivory); 22 lm/W (Smoke)
90 CRI

LED LIFESPAN

50k hours

PATENT FILE NUMBER

Patent Number D930,226, 187450, 201912511, 006433652-0001

CERTIFICATION

UL Listed
Suitable for Damp Locations



NOTE ON IMAGERY

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

SUSPENSION

White 6" round flat canopy, 6" mud-in (recessed) canopy. (6) ceiling grips and (1) end grip included.

Standard 120" cord between globes. Custom cord length available upon request.

Recommended Hang Height 66", refer to dimensional drawings for more info

Not field trimmable

PRODUCT DIMENSIONS

Dimension will vary base on selected configuration. Please download Tech Pack for details.

DIMENSIONAL WEIGHT

88.4 lbs

YOUR PRODUCT CODE

VS-5- - - - - - - -

Specification Logic

GLASS FINISH

Ivory	IV
Frosted Smoked	SM

CORD FINISH

Black Cord	CB
Custom Color Cord	CX
White Cord	CW

CLASP FINISH

Black Anodized	AA04
Natural Anodized	AA01
White Gold Anodized	AA02
Custom Powder Coated	PCXX
Polished Chrome	PF13


COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35


DIMMING / CONTROL / INPUT

1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
Low Voltage (Driver required, driver not included)	LV


Drawings

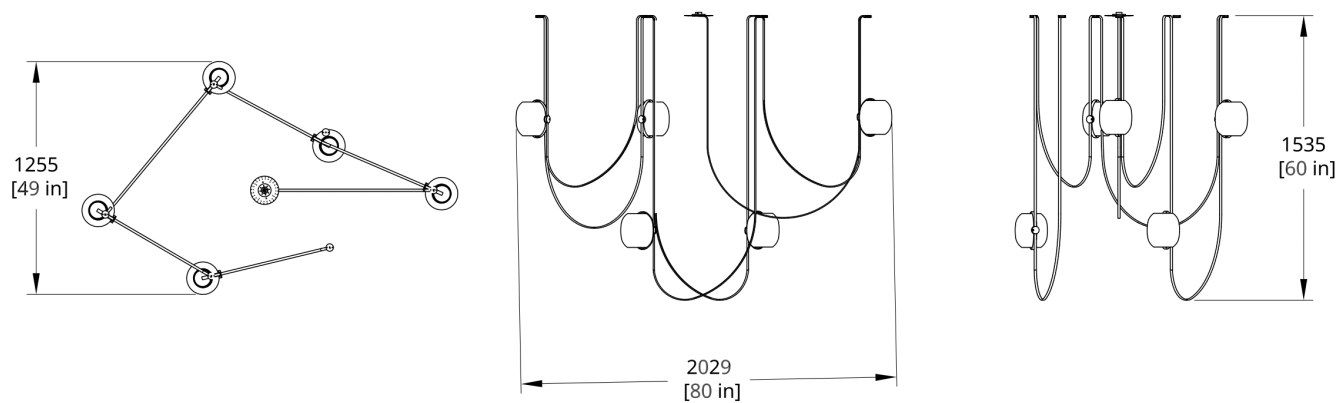



VS-5 Vitis Chandelier (Condensed) Dimension

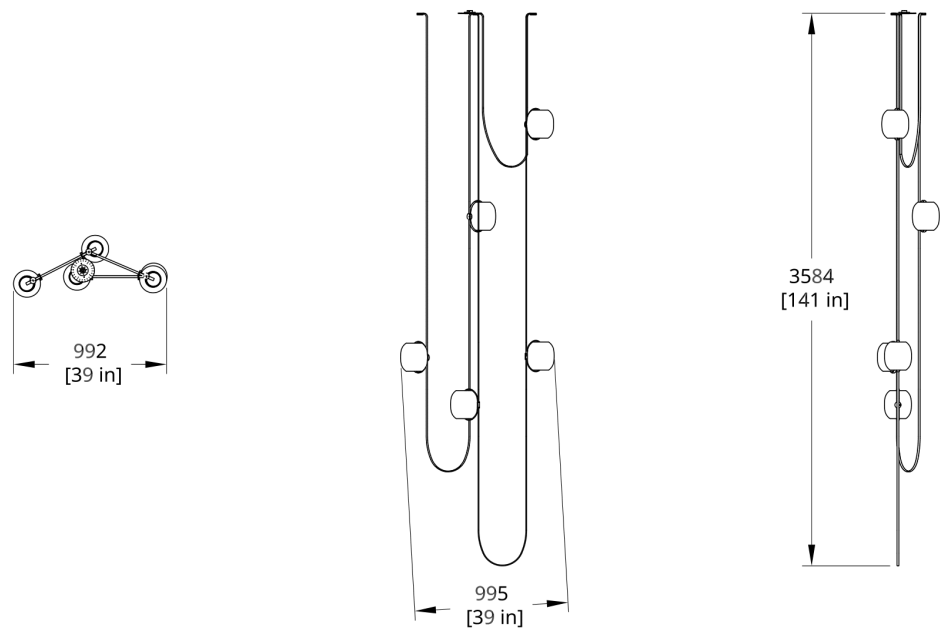



VS-5 Vitis Chandelier (Extra Long) Dimension

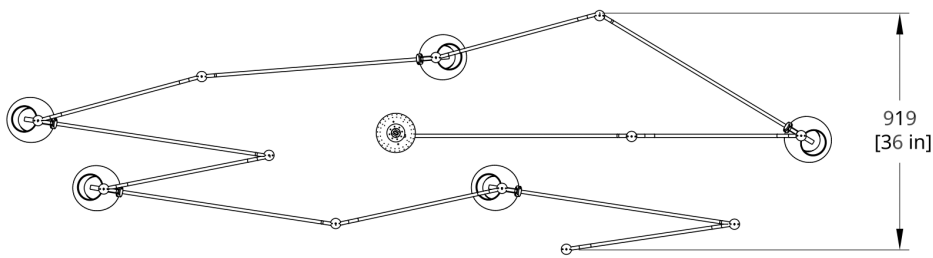

To achieve this installation, you'll need (6) additional ceiling grips beside the ones provided with the fixture. You can purchase them directly on rbw.com/accessories

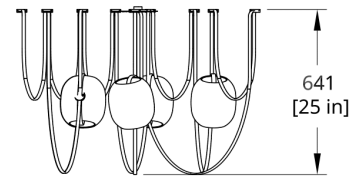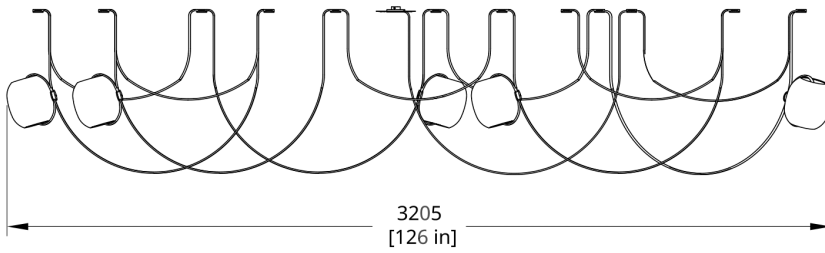

VS-5 Vitis Chandelier (High) Dimension

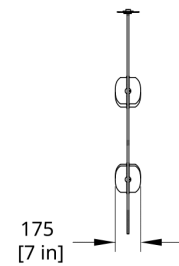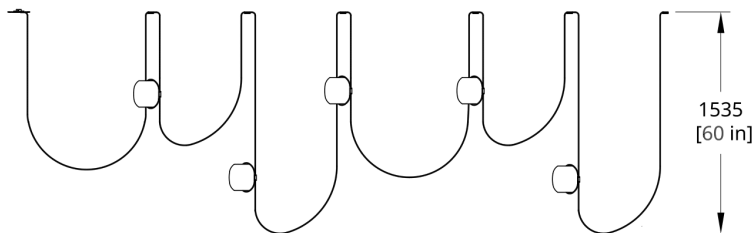

VS-5 Vitis Chandelier (Linear) Dimension