RETREAT 1.0

Technical Specifications

Designed for a private and peaceful drop in space to make a phone call, attend a virtual meeting, or focus on a task, RETREAT 1.0 is traditional in its rectangular geometry and fits neatly into any office space, coordinating with the complete RETREAT range to offer flexibility for workplace design. Standard features include comfortable ventilation, a fixed or drop-down table top, and a built in dimmable VC light that allows the user to create cool to warm skin tones as desired during virtual meetings.



Low noise, sensor-controlled ventilation system with constant air exchange via top and base outlets with internal fan systems.



ENVIRONMENTAL DATA

60% recycled content to PET. Sustainably sourced timber FSC timber available on request.



Seamless mechanical services integration with allowances for a sprinkler and smoke detector.



VC LIGHT

Dimmable touch activated



Acoustic materials used for internal and external surfaces provide ambient noise reduction and minimise noise reverberation from the surrounding office.



ACCESS

RETREAT sits flush on the floor with a rubber seal for acoustic protection, there is no step or floor base to incumber entry.



PLUG AND PLAY
Quick con-Quick connection to mains power using



WARRANTY


7 year structural warranty.




RETREAT 1.0 requires 2 men for 2-3 hours.



PRODUCT DATA





Product dimensions

External dimensions Internal dimensions People

1045W x 1120D x 2178mmH 870W x 990D x 2092mmH

Ventilation

QTY of fans 4 total; 2 draw in through

side, 2 draw out through

ceiling Air flow rate 117.2CFM 24V DC Input

User motion detected to 30sec / 3min / 10min

Power

Lighting

Input

Power usage

Lumen output

LED options

Mains supply 10 amps Cord from booth 3 metres

2 gang; 1x Power, 1x USB A, 1x USB C Output

9.6W

24V

User motion detected to 30sec / 3min / 10min

85lm/W

Natural white

Socket options







Motion sensor Passive infrared sensor

Running time options 30sec / 3min / 10min

VC light

Natural white

Touch activated dimmable

PET

100% PET, 60-68% recycled Composition Sustainability Greentag certified. Greenrate level: A

VOC Emission $<0.004 \text{mg/m}^2/\text{hr}$

Structure

Faced plywood 64mm hoop pine plywood Acoustic wall paneling Internal Acoustic wall covering External

Door

Door dimensions 846W x 2069H x 8mm frameless toughened glass

Door weight 20kg

Disabled access No wheelchair access - disability accessible

Door hardware Stainless steel or matte black Drop seal Engaged when door is closed

Floor

Levelling Adjustable glides

Floor No floor - sealed perimeter

Install

Time 2-3 hours

2 People required

Fire safety

Fire alarm Provision provided on request Smoke detection Provision provided on request Sprinkler compatible Provision provided on request

Cleaning

PET / Upholstery Timber

Refer to product care and maintainence guide Refer to product care and maintainence guide



OPTIONS & FINISHES

RETREAT 1.0 back options







PET back

RETREAT 1.0 table options



Fixed table Dimensions Height from floor Worktop finish Edge finish

880x320x32mm 1050mmH White or black worktop Natural or black stain



Fold down table Dimensions Height from floor Worktop finish Edge finish Shelf finish

880x320x18mm 1050mmH White or black worktop White or black Natural or black stain edge

Timber finishes



Black Stain

Stool upholstery finishes










Blazer St Andrews

Interior / exterior finishes

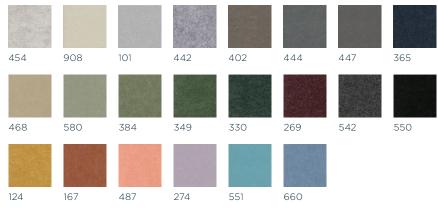

^{*}Contact Square-Bear Acoustics for custom colour options.

SQUARE BEAR

© Copyright 2021 All Rights Reserved

HEAD OFFICE

Unit 6/80 Jedda Road, Prestons New South Wales 2170, Australia P: +61 (0)2 9189 1444 sales@square-bear.com

SYDNEY SHOWROOM

120 Bourke Street, Woolloomooloo New South Wales 2011, Australia

www.square-bear.com

