RETREAT 1.1

Technical Specifications

Designed for one person to work within, or two for a guick chat, RETREAT 1.1 is manufactured using sustainable timber frames and acoustic fabric panels in a range of colour combinations. Table top options are available as either a fixed or drop down version, and an inbuilt light with sensor controlled LED provides energy efficiency. Acoustic panels are used on both the interior and exterior to maximise acoustic performance. RETREAT comes without a floor base to allow for all users to enter the space without hinderance.



Low noise, sensor-controlled ventilation system with constant air exchange via top and base outlets with internal fan systems.



ENVIRONMENTAL DATA

60% recycled content to PET. Sustainably sourced timber FSC timber available on request.



SERVICES

Seamless mechanical services integration with allowances for a sprinkler and smoke detector.



VC LIGHT

Dimmable touch activated



Acoustic materials used for internal and external surfaces provide ambient noise reduction and minimise noise reverberation from the surrounding office.



RETREAT sits flush on the floor with a rubber seal for acoustic protection, there is no step or floor base to incumber entry.



PLUG AND PLAY
Quick conn Quick connection to mains power using standard sockets.



WARRANTY


7 year structural warranty.




RETREAT 1.1 requires 2 men for 2-3 hours



PRODUCT DATA





Product dimensions

External dimensions 1136/1450W x 1120D x 2178mmH Internal dimensions 970/1286W x 990D x 2092mmH 1-2

People

Ventilation

QTY of fans 4 total; 2 draw in through

side, 2 draw out through

ceiling

Air flow rate 117.2CFM 24V DC Input

User motion detected to 30sec / 3min / 10min

Power

Mains supply 10 amps Cord from booth 3 metres

2 gang; 1x Power, 1x USB A, 1x USB C Output

Socket options







Lighting

Input 24V 85lm/W Lumen output Natural white LED options User motion detected to 30sec / 3min / 10min

Motion sensor

Passive infrared sensor

Running time options 30sec / 3min / 10min

VC light

Natural white

Touch activated dimmable

PET

100% PET, 60-68% recycled Composition

Sustainability Greentag certified. Greenrate level: A

VOC Emission $<0.004 \text{mg/m}^2/\text{hr}$

Structure

Faced plywood 64mm hoop pine plywood Acoustic wall paneling Internal External Acoustic wall covering

Door

Door dimensions 718/876W x 2068H x 8mm frameless toughened glass

Door weight 23kg

Disabled access No wheelchair access - disability accessible

Door hardware Stainless steel or matte black Drop seal Engaged when door is closed

Floor

Levelling Adjustable glides

Floor No floor - sealed perimeter

Install

Time 2-3 hours

2 People required

Fire safety

Fire alarm Provision provided on request Smoke detection Provision provided on request Sprinkler compatible Provision provided on request

Cleaning

PET / Upholstery Timber

Refer to product care and maintainence guide Refer to product care and maintainence guide



OPTIONS & FINISHES

RETREAT 1.1 back options







PET back

RETREAT 1.1 table options



Fixed table Dimensions Height from floor Worktop finish Edge finish





Fold down table Dimensions Height from floor Worktop finish Edge finish Shelf finish

880x320x18mm 1050mmH White or black worktop White or black Natural or black stain edge

Timber finishes



Black Stain

Stool upholstery finishes

Blazer Silcoates




Blazer Surrey



Blazer St Andrews

Interior / exterior finishes

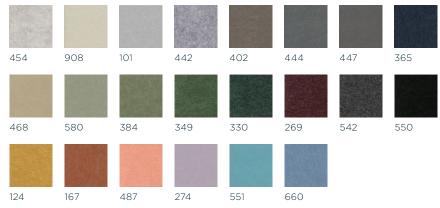

^{*}Contact Square-Bear Acoustics for custom colour options.

SQUARE BEAR

© Copyright 2021 All Rights Reserved

HEAD OFFICE

Unit 6/80 Jedda Road, Prestons New South Wales 2170, Australia P: +61 (0)2 9189 1444 sales@square-bear.com

SYDNEY SHOWROOM

120 Bourke Street, Woolloomooloo New South Wales 2011, Australia

www.square-bear.com

