


Model Sheet



Finish

- 18 Polimer Concrete Grey
NCS S 2002-B50G
- 22 Graphite Black
NCS S 8000-N

LED temperature color 2700 K / 3500 K

Dimming On/Off

Installation type Surface

Materials Body: Polymer Concrete
Diffuser: PMMA

Light source 2 x LED STRIP 24V 4,3W



LED CRI>70 567 lm 66
2700 K / 3500 K

Driver Constant Voltage 100~240 V V
50~60 Hz HZ

Remarks Resistance to weight: 150 kg
evenly distributed over the
cantilevered surface of the lamp.
This force should not be applied by
impact.



50-60Hz

Application Outdoor lamps

Packaging 1 Box
0.364 m x 0.364 m x 0.364 m
Gross weight 12.6
Net weight 11.34
Vol. 0.0482


Lighting effect

Reflected

Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the product



Photometric Data

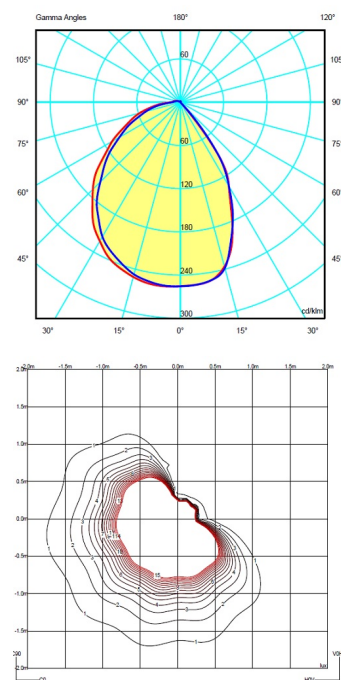

Other Applications

