
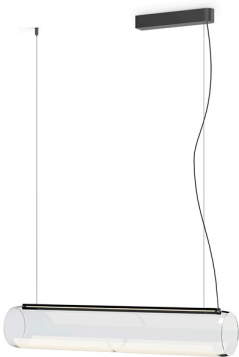









Model Sheet



Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

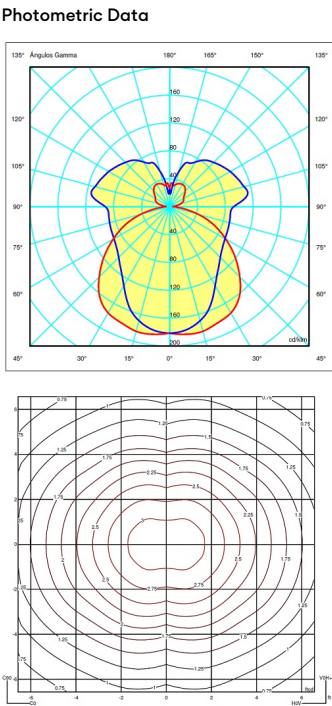

Finish	18 Graphite ADAPTA RF 9913 WX
LED temperature color	3000 K
Dimming	Optical sensor / Casambi / DALI-2
Installation type	Surface Canopy

Materials	Profile: Aluminum Diffuser: Borosilicate
Light source	1 x LED STRIP 24V 30W G
LED	CRI>90 2613.6 lm 87.12 3000 K
Driver	Constant Voltage 100~240 V V 50~60 Hz HZ
Remarks	The glass is made of borosilicate. It is typical for the glass to have small air bubbles, some inclusions and tiny scratches. These do not affect the quality or the resistance of the glass.
	  Dimmer  LED
	 IP20  Bi-volt  Dry Location  50-60Hz

Application	Hanging lamps
Packaging	1 Box 1.18 m x 0.35 m x 0.37 m Gross weight 9.5 Net weight 7.5 Vol. 0.1528

Lighting effect

Volumetric Diffuser
Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Efficiency	1
Coordinate System	CG
Total Flux	1158.86 lm
Maximum Value	185.32 cd/klm

