


Model Sheet

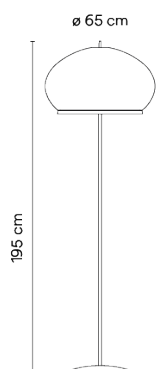

Finish 24 Beige M1
NCS S 2005-Y50R

LED temperature color 2700 K

Dimming Push / Casambi

Installation type Plug-in


Materials Fabric Shade: PES FR
Diffuser ring and support: ABS
Tube: Steel
Base: Zinc Alloy

Light source 6 x LED 5,9W 1050mA



LED CRI>90 4740 lm 133.9
2700 K

Driver Constant Voltage 1050
100~240 V V 50~60 Hz HZ



Application Floor and Table Lamps

Packaging 2 Box
0.46 m x 0.45 m x 1.93 m
Gross weight 30
Net weight 18.5
Vol. 0.7649



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data



Efficiency 59.24 lm/W
Coordinate System CG
Total Flux 2645.16 lm
Maximum Value 266.71 cd

Other Applications

