


Model Sheet

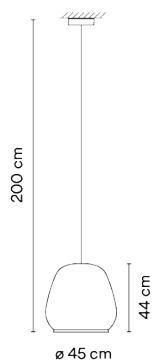

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	24 Beige M1 NCS S 2005-Y50R
LED temperature color	2700 K
Dimming	1-10V / Casambi / DALI
Installation type	Built-in XS / Remote Micro / Surface Free Wire / Surface Canopy

Materials Fabric Shade: PES FR
Diffuser ring and support: ABS
Diffuser: PMMA
Ceiling rose: ABS

Light source 6 x LED 5,9W 1050mA



LED CRI>90 4740 lm 133.9
2700 K

Driver Constant Current 1050
110~240 V V 50~60 Hz HZ



LED IP20

Bi-volt

50-60Hz

1-10V

Application Hanging lamps

Packaging 1 Box
0.55 m x 0.55 m x 0.65 m
Gross weight 6
Net weight 3.7
Vol. 0.1966



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data



Efficiency	46.61 lm/W
Coordinate System	CG
Total Flux	1842.25 lm
Maximum Value	186.24 cd

Other Applications

