
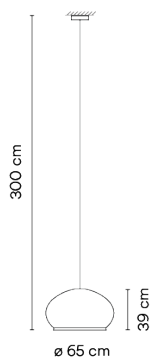


Model Sheet

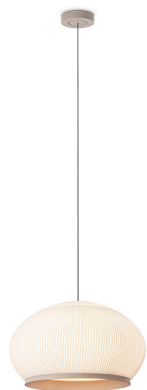

Optional: Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

| | |
|------------------------------|---|
| Finish | 24 Beige M1 NCS S 2005-Y50R |
| LED temperature color | 2700 K |
| Dimming | DALI / 1-10V / Casambi |
| Installation type | Remote XXS / Built-in XS / Surface Free Wire |


| | |
|------------------|---|
| Materials | Fabric Shade: PES FR Diffuser ring and support: ABS Diffuser: PMMA Ceiling rose: ABS |
|------------------|---|

| | |
|---------------------|-----------------------|
| Light source | 6 x LED 6,7 W 1200 mA |
|---------------------|-----------------------|



| | |
|------------|--------------------------------|
| LED | CRI>90 4740 lm 133.9 2700 K |
|------------|--------------------------------|

| | |
|---------------|--|
| Driver | Constant Current 1200 110~240 V V 50~60 Hz HZ |
|---------------|--|




| | |
|--------------------|---------------|
| Application | Hanging lamps |
|--------------------|---------------|

| | |
|------------------|---|
| Packaging | 1 Box 0.593 m x 0.785 m x 0.785 m Gross weight 9 Net weight 5.5 Vol. 0.3654 |
|------------------|---|



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data



| | |
|--------------------------|------------|
| Efficiency | 59.24 lm/W |
| Coordinate System | CG |
| Total Flux | 2645.16 lm |
| Maximum Value | 266.71 cd |

Other Applications

