




The glass shade wall light features an open metal frame imbedded with LEDs that contains a cylindrical diffuser made of mouthblown opaline glass. The black frame is affixed to the wall, generating a warm, 360-degree glow as if from a fire. Install in a vertical position.

Model Sheet


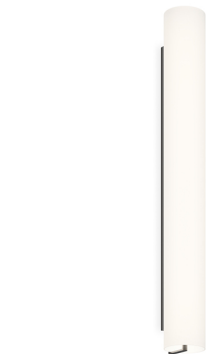


Finish	11 Black NCS S 8500-N
LED temperature color	2200 K / 2700 K / 3000 K / 3500 K Optional 2200 K / 2700 K / 3000 K / 3500 K Min. quantity, upcharge and extra lead time apply [EN]
Dimming	1-10V / DALI / Push / Casambi
Installation type	Surface Canopy
Materials	Body: Aluminum Shade: Blown-glass Driver box: Aluminum
Light source	1 x LED STRIP 27,9W 750mA E
LED	CRI>90 2907 lm 104 2200 K / 2700 K / 3000 K / 3500 K
Driver	Constant Current 750 90~305 V V 50~60 Hz HZ Dimmable LED IP20 Multi-volt 50-60Hz 1-10V TRIAC
Application	Wall Lamps
Packaging	1 Box 1.43 m x 0.3 m x 0.3 m Gross weighth 11.5 Net weighth 7.5 Vol. 0.1287

Lighting effect
Reflected
Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the product




Photometric Data



Efficiency	41.96 lm/W
Coordinate System	CG
Total Flux	1338.37 lm
Maximum Value	222.01 cd

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty