


Model Sheet




Finish  03 White
RAL 9016

LED temperature color 2700 K

Dimming On/Off


Installation type Surface Canopy

Materials Ceiling rose: Aluminum
Diffuser: Blown-glass

LED  CRI>90 1640 lm 112
2700 K

Driver Constant Current 350 100~240
V V 50~60 Hz HZ

Remarks Only one electric connection

  **Dimmable** **LED**
  **IP20** **Bi-volt** **50-60Hz**


Application Ceiling Lamps

Packaging 1 Box
0,42 m x 0,42 m x 0,285 m
Gross weight 4
Net weight 3,06
Vol. 0,0502



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

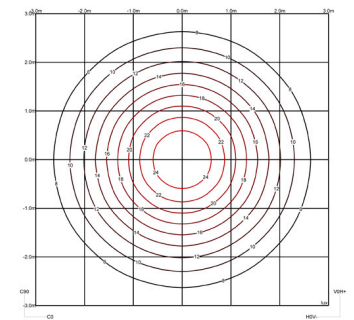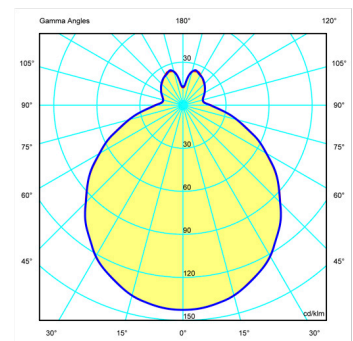

Other Applications

