

Puck wall art




VIBIA

5485

Design By Jordi Vilardell

Wall sconce formed by two circular bodies with a single electrical connection. Available in different lacquered aluminium and felt finishes.

Model Sheet

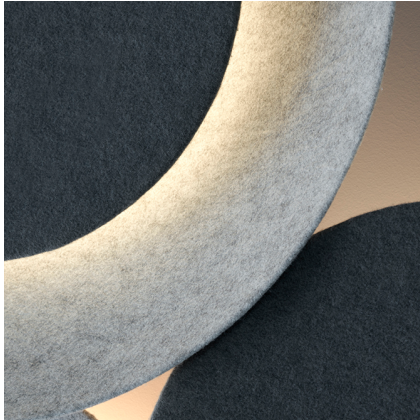

Finish

- 73 Brown M1 & Grey D1
NCS S 4020-Y60R & NCS S 7000-N
- 72 Grey D1 & Grey L2
NCS S 7000-N & NCS S 2500-N

LED temperature color 2700 K / 3500 K

Dimming Casambi / DALI-2 / TRIAC / Push

Installation type Surface Canopy

Materials

- Shade: ABS
- Wall support: Aluminum
- Ring: Steel
- Diffuser: PC- Polycarbonate

Light source

- 1 x LED STRIP 12,6W 700mA
- 1 x LED STRIP 8,4W 700mA



LED CRI>90 2388.4 lm 91.3
2700 K / 3500 K

Driver Constant Current 700 110~240
V V 50~60 Hz HZ

Remarks A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system.

  **Dimmable** **IP20**
Bi-volt **50-60Hz**  **1-10V**  **TRIAC**

Application Wall Lamps

Packaging

- 1 Box
- 0.68 m x 0.68 m x 0.2 m
- Gross weight 5.9
- Net weight 4.22
- Vol. 0.0924



Lighting effect

Reflected

Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the product




Photometric Data



Efficiency 37.02 lm/W
Coordinate System CG
Total Flux 947.03 lm
Maximum Value 207.68 cd

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com