


### Model Sheet

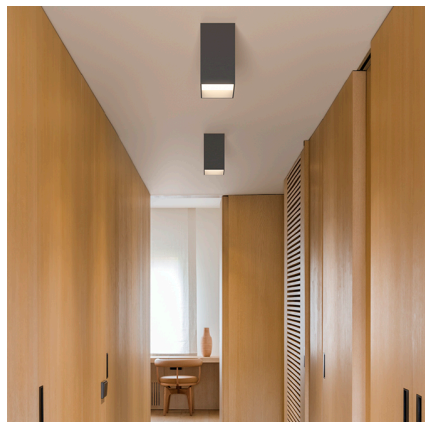

**Finish**

21 Black Grey  
NCS S 7000-N

15 Grey L2  
NCS S 2500-N

**LED temperature color**

2700 K / 3000 K / 3500 K

**Dimming**

1-10V / Casambi / DALI-2

**Installation type**

Surface Canopy

**Materials**

Body: Aluminum  
Diffuser: PC- Polycarbonate  
Profile: Aluminum

**LED**

E  
CRI>90  
2700 K / 3000 K / 3500 K

**Driver**

Constant Voltage 110~240 V V  
50~60 Hz HZ

**Remarks**

Main input by the biggest box

Dimmable LED  
IP20 Bi-volt 50-60Hz 1-10V

**Application**

Ceiling Lamps


**Packaging**

1 Box  
0.21 m x 0.31 m x 0.31 m  
Gross weight 2.7  
Net weight 2.2  
Vol. 0.0201



#### Lighting effect

##### Hidden Diffuser

Subtly directed diffused light that generates a soft hierarchy of light on to the illuminated surface



#### Photometric Data



**Efficiency** 51.19 lm/W  
**Coordinate System** CG  
**Total Flux** 565.65 lm  
**Maximum Value** 270.71 cd

#### Other Applications

