


2640

Design By Arik Levy

Ceiling light where different cubic volumes meet or expand to provide flexible solutions, maintaining spatial order.

Model Sheet






Finish	21 Black Grey NCS S 7000-N 15 Grey L2 NCS S 2500-N
LED temperature color	2700 K / 3000 K / 3500 K / Tunable White
Dimming	1-10V / Casambi / DALI-2
Installation type	Surface Canopy
Materials	Body: Aluminum Diffuser: PC- Polycarbonate Profile: Aluminum
LED	E CRI>90 2700 K / 3000 K / 3500 K / Tunable White
Driver	Constant Voltage 110~240 V V 50~60 Hz HZ
Remarks	Main input by the biggest box Dimmable LED IP20 Bi-volt 50-60Hz 1-10V
Application	Ceiling Lamps
Packaging	3 Box 0.24 m x 0.38 m x 0.38 m Gross weighth 8.4 Net weighth 5.3 Vol. 0.0604


Lighting effect

Hidden Diffuser

Subtly directed diffused light that generates a soft hierarchy of light on to the illuminated surface

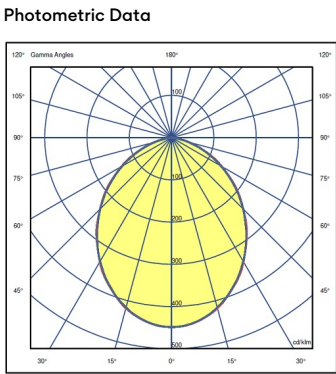

Efficiency	62.84 lm/W
Coordinate System	CG
Total Flux	2073.70 lm
Maximum Value	930.73 cd



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty