



2645

Design By Arik Levy

Ceiling light where different cubic volumes meet or expand to provide flexible solutions, maintaining spatial order.

Model Sheet

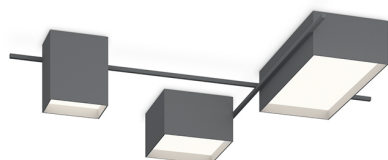


Finish	21 Black Grey NCS S 7000-N
	15 Grey L2 NCS S 2500-N
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	1-10V / DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Body: Aluminum Diffuser: PC- Polycarbonate Profile: Aluminum
LED	E CRI>90 2700 K / 3000 K / 3500 K
Driver	Constant Voltage 110~240 V V 50~60 Hz HZ
Remarks	Main input by the biggest box Dimmable LED IP20 Bi-volt 50-60Hz 1-10V
Application	Ceiling Lamps
Packaging	4 Box 0.38 m x 0.61 m x 0.22 m Gross weight 14.3 Net weight 10.2 Vol. 0.1148



Lighting effect

Hidden Diffuser

Subtly directed diffused light that generates a soft hierarchy of light on to the illuminated surface




Photometric Data



Efficiency	69.34 lm/W
Coordinate System	CG
Total Flux	5200.43 lm
Maximum Value	2251.45 cd

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com