


Model Sheet

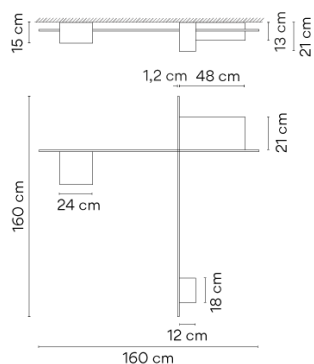

Finish

- 15 Grey L2
NCS S 2500-N
- 21 Black Grey
NCS S 7000-N

LED temperature color

2700 K / 3000 K /
3500 K / Tunable
White

Dimming

1-10V / DALI-2 / Casambi

Installation type

Surface Canopy

Materials

Body: Aluminum
Diffuser: PC- Polycarbonate
Profile: Aluminum

LED

E
CRI>90
2700 K / 3000 K / 3500 K /
Tunable White

Driver

Constant Voltage 110~240 V V
50~60 Hz HZ

Remarks

Main input by the biggest box

  **Dimmable** **LED**
  **IP20** **Bi-volt** **50-60Hz**  **1-10V**

Application

Ceiling Lamps


Packaging

4 Box
0.38 m x 0.61 m x 0.22 m
Gross weight 13.1
Net weight 10.35
Vol. 0.1148



Lighting effect

Hidden Diffuser

Subtly directed diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data



Efficiency 69.34 lm/W
Coordinate System CG
Total Flux 5200.43 lm
Maximum Value 2251.45 cd

Other Applications

