


Model Sheet

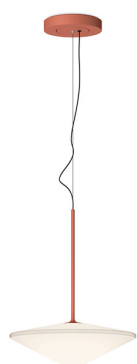

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	18 Graphite ADAPTA RF 9913 WX
	58 Cream RAL 7044
	37 Terra Red NCS S 4040-Y70R
LED temperature color	2700 K
Dimming	DALI-2 / Push; 1-10V / Casambi
Installation type	Surface Canopy / Remote Micro / Built-in XS
Materials	LED support: Aluminum Diffuser: Blown-glass Ceiling rose: Steel
Light source	1 x LED 4W 350mA E
LED	CRI>90 440.81 lm 110 2700 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ
Application	⚡ F Dimmable LED
	IP20 Bi-volt 50-60Hz
Packaging	1 Box 0.41 m x 0.41 m x 0.2 m Gross weight 4 Net weight 2.5 Vol. 0.0336



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

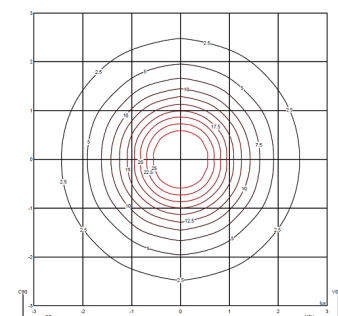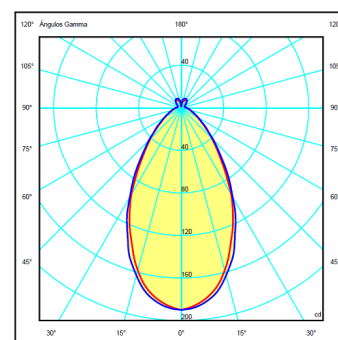

Other Applications

