



Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

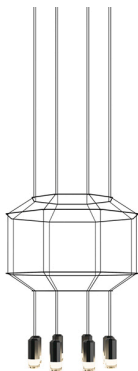


Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish	<div><div></div>04 Black RAL 9005</div>
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	8 x LED 4,48W 350mA <div>D</div>
LED	CRI>90 3922 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ <div><div></div>F</div> <div>Dimmable</div> <div>LED</div> <div>IP20</div> <div>Bi-volt</div> <div>50-60Hz</div>
Application	Hanging lamps
Packaging	2 Box 0.6 m x 0.6 m x 0.27 m Gross weight 11.9 Net weight 9.25 Vol. 0.1558


Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

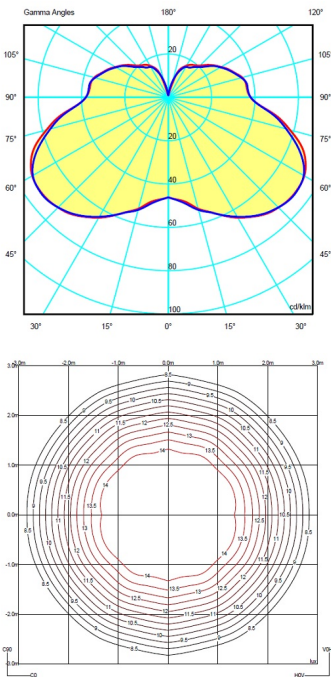

Efficiency	40.11%
Coordinate System	CG
Total Flux	2941.60
Maximum Value	53.87

Other Applications

