
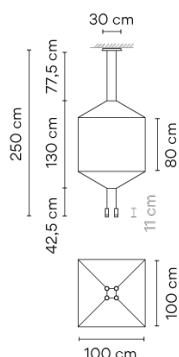


Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

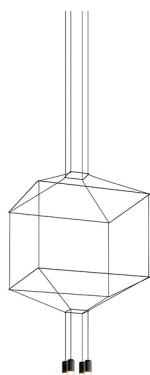

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish 04 Black
RAL 9005

LED temperature color 2700 K / 3000 K / 3500 K

Dimming Push; 1-10V; DALI-2 / Casambi

Installation type Surface Canopy


Materials Ceiling rose: Steel
Body: Aluminum
Horizontal rods: Steel

Light source 4 x LED 4,48W 350mA



LED CRI>90 1961 lm 108
2700 K / 3000 K / 3500 K

Driver Constant Current 350 110~240
V V 50~60 Hz HZ



Dimmable **LED**

IP20 **Bi-volt** **50-60Hz**


Application Hanging lamps

Packaging 2 Box
1.158 m x 1.133 m x 0.086 m
Gross weight 10.4
Net weight 8.86
Vol. 0.1569



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data



Efficiency 40.11%

Coordinate System CG

Total Flux 1961

Maximum Value 53.86

Other Applications

