


PACE 28 — P

PENDANT

A—N—D

Designed by Caine Heintzman

2025

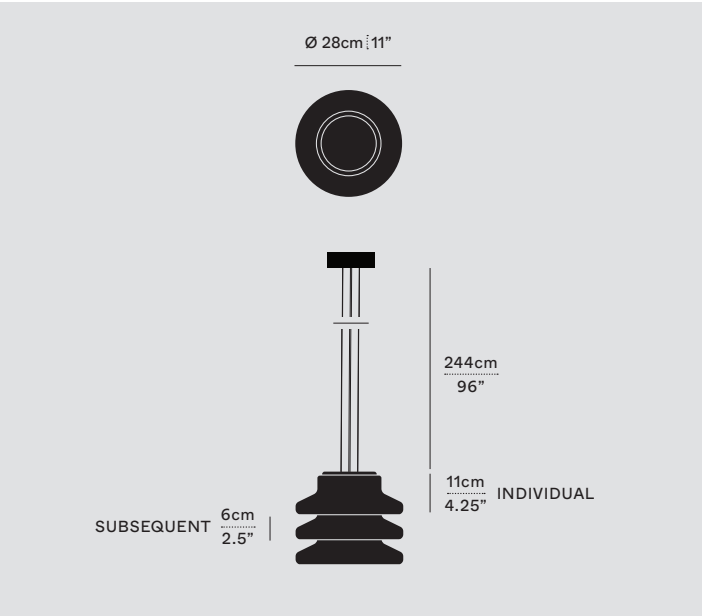

PAC-28-3-P-TRN-DW-ELV-120

A-N-D.COM

TYPE

Pendant

DIMENSIONS

Individual: Ø 28cm x 11cm / Ø 11" x 4.25"

Subsequent: Ø 28cm x 6cm / Ø 11" x 2.5"

Adjustable drop length

244cm / 96" — Custom length available

Weights

1: 4kg / 8lbs

2: 5kg / 11lbs

3: 6kg / 14lbs

6: 10kg / 22lbs

9: 13.5kg / 30lbs

12: 17kg / 38lbs

15: 21kg / 46.5lbs

3D MODELS

REVIT, IES, DWG, 3DS, Rhino, Sketchup

MATERIALS

Glass, Aluminum

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

24V DC LED, CRI 90+, 50,000 hours

Controls

Phase dimming, 0–10V, DALI

DIM TO WARM

Warm / DIM -


Bright / DIM +



COLOUR TEMPERATURE

Warm

Neutral



MANUFACTURED

Canada

FINISHES



Float (FLT)



Translucent (TRN)



Umber (UMB)



For custom finishes, please inquire.

CERTIFICATIONS




Application: dry indoor location only


SERIES	SIZE	UNIT	TYPE	FINISH	CCT	PS	VOLTAGE IN
PAC	28	☐ 1	P	☐ FLT (FLOAT)	☐ 27 (2700K)	☐ ELV	☐ 120
		☐ 2		☐ TRN (TRANSLUCENT)	☐ DW (DIM TO WARM)	☐ 010	☐ 230
		☐ 3		☐ UMB (UMBER)		☐ DAL	☐ 277*
		☐ 6					
		☐ 9					
		☐ 12					
		☐ 15					

*277 only available with 010


PAC-28-1-P

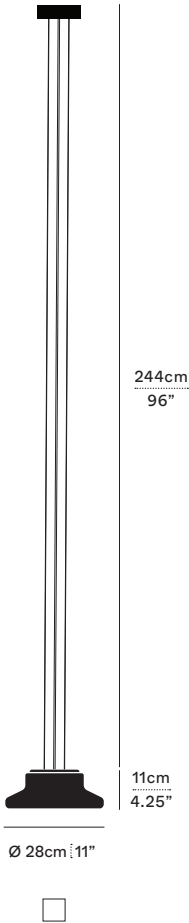


PAC-28-2-P

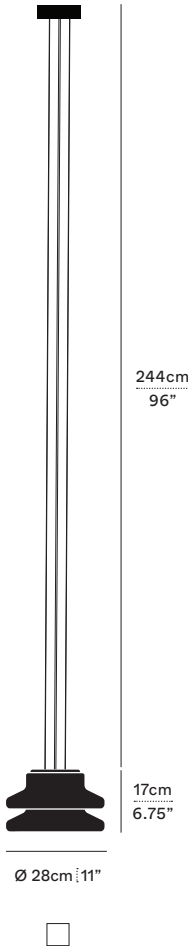


PAC-28-3-P

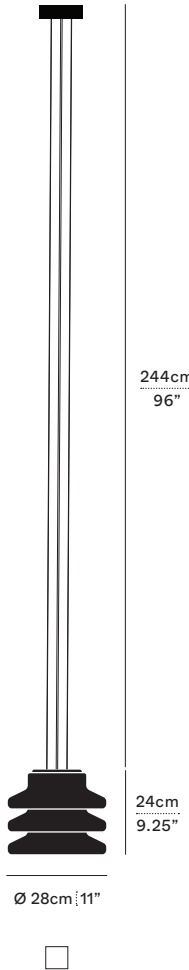


PAC-28-6-P

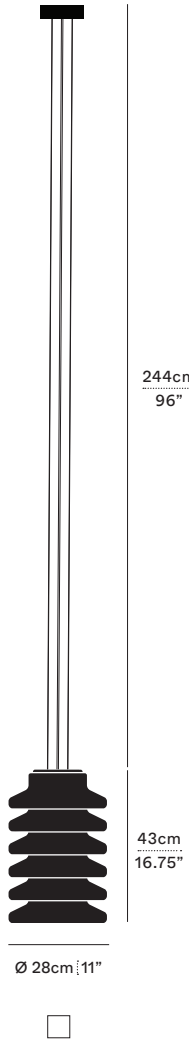

PAC-28-9-P

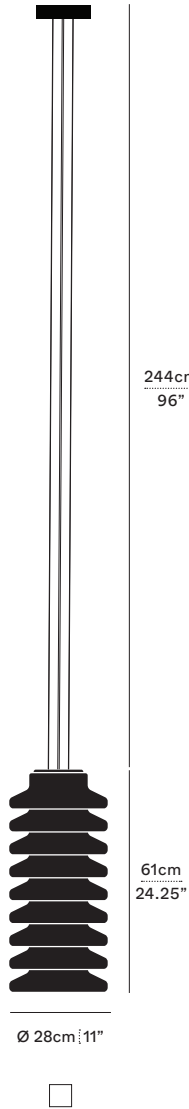

PAC-28-12-P

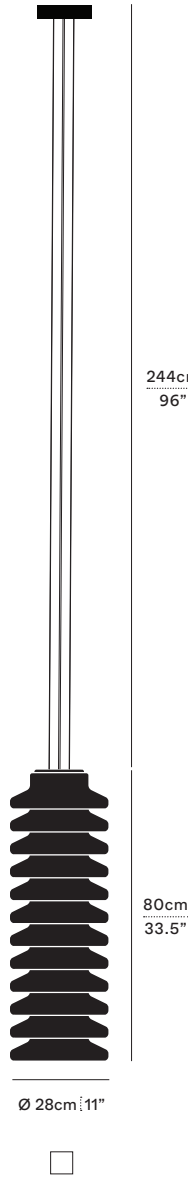

PAC-28-15-P

