

# Crepe Sconce

Sconces

50 Greene St  
New York NY 10013  
T +1 212 388 1621  
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](https://rbw.com)

DESCRIPTION

Crafted entirely from glass, the Crepe collection creates a mesmerizing depth of light and form with a layered diffuser and shade. This collection is created in collaboration with Little Wing Lee of Studio & Projects.

MATERIALS

Cast solid glass, aluminum

COLLECTION NOTES

Crepe Small 9" & Medium 15" are ADA compliant, while Large 19" is not.

PERFORMANCE

Delivered Lumens: 623.1 lm (DC) | 486.3 lm (AC)

Power Consumption: 7.1W (DC) | 8W (AC)

Luminaire Efficacy: 87.8 lm/W (DC) | 61.1 lm/W (AC)

90+ CRI

Above stats are based on small globes on Frosted glass plate (applicable for Crepe Small 9" & Crepe Medium 15")

For other configurations please check Photometry in the Download section.

LED LIFESPAN

50k hr

PATENT FILE NUMBER

Patent Pending

CERTIFICATION

ADA Compliant

UL Listed

IP20



NOTE ON IMAGERY

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

PRODUCT DIMENSIONS

Small: 7.5 in W x 8.8 in H x 3.4 in D | Medium: 12.6 in W x 14.9 in H x 3.4 in D | Large: 15.7 in W x 18.6 in H x 4.9 in D

PRODUCT WEIGHT

Small 9": 3.5lbs | Medium 15": 4.9lbs | Large 19": 7.2lbs

DIMENSIONAL WEIGHT

Small 9": 1.3 lbs  
Medium 15": 3.8 lbs  
Large 19": 8.7 lbs



YOUR PRODUCT CODE

CRP-WS- - - - - - -



Specification Logic

SIZE

|            |    |
|------------|----|
| Small 9"   | 9  |
| Medium 15" | 15 |
| Large 19"  | 19 |

GLASS FINISH

|         |     |
|---------|-----|
| Blush   | S17 |
| Frosted | S22 |

COLOR TEMPERATURE

|                       |    |
|-----------------------|----|
| 2700K (warm white)    | 27 |
| 3000K (soft white)    | 30 |
| 3500K (neutral white) | 35 |


DIMMING / CONTROL / INPUT

|                                                                               |               |
|-------------------------------------------------------------------------------|---------------|
| 0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External) | 0.1_10V_UNV   |
| 1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)   | 1_10V_UNV     |
| 1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)       | 1_TRIAC_120V  |
| 10% Dimming, TRIAC / Forward Phase Control, 120V Input                        | 10_TRIAC_120V |
| Low Voltage (Driver required, driver not included)                            | LV            |


IP RATING

|       |      |
|-------|------|
| IP 20 | IP20 |
|-------|------|


Drawings

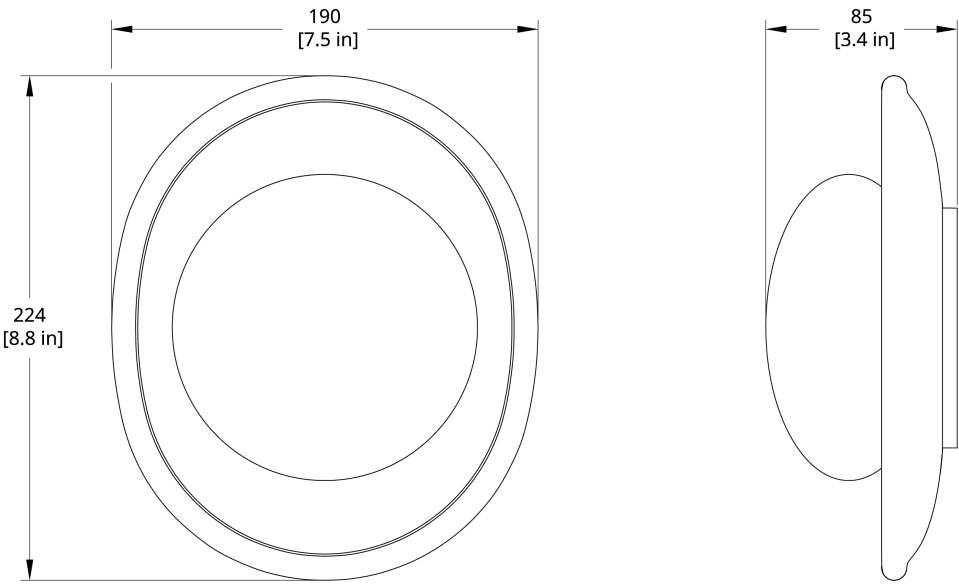

CP Crepe Small Dimensional Drawing

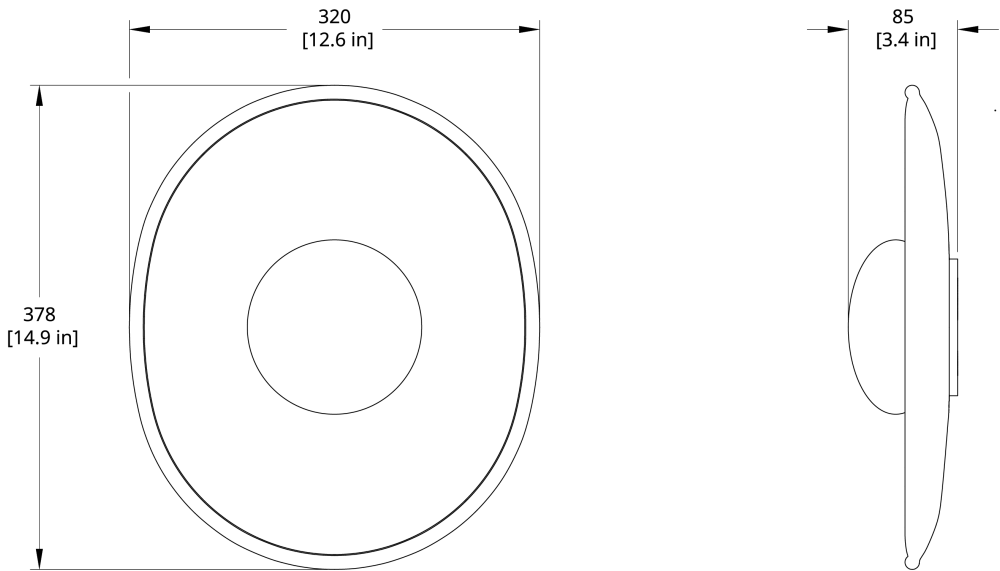

CP Crepe Medium Dimensional Drawing

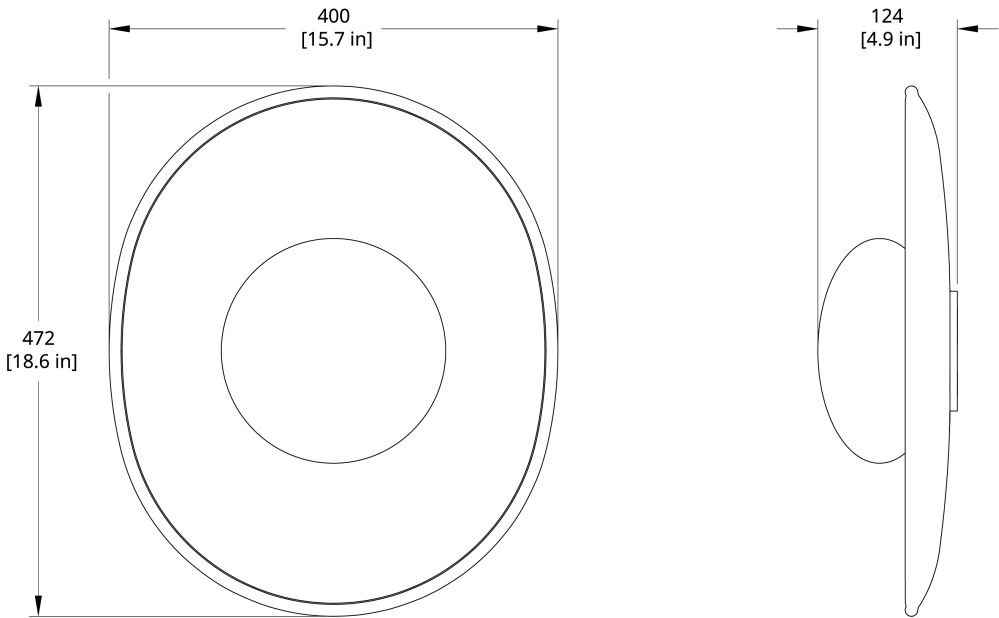

CP Crepe Large Dimensional Drawing