
PACE 28 — CW

A—N—D

CEILING/WALL

Designed by Caine Heintzman — 2025



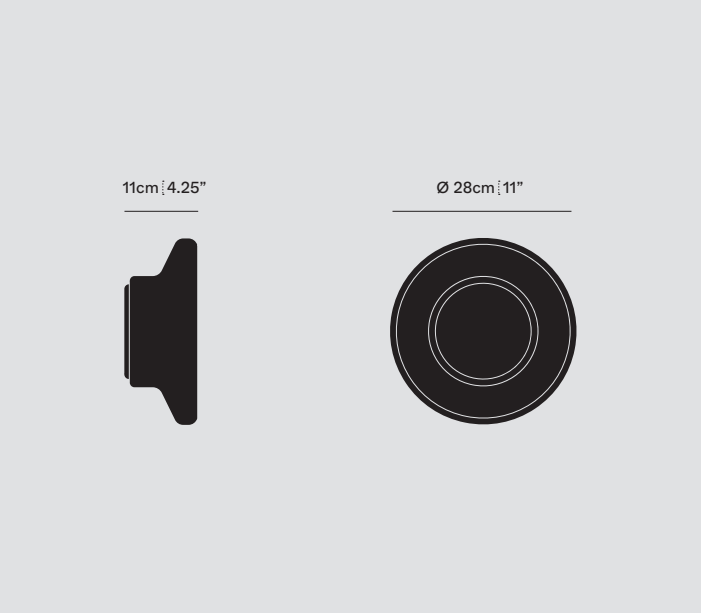

PAC-28-CW-FLT-DW-ELV-120 — A-N-D.COM

TYPE
Ceiling/Wall

DIMENSIONS
Ø 28cm x 11cm / Ø 11” x 4.25”

MOUNTING OPTIONS
Driver remote and/or standard junction box
–See install instructions for more details

3D MODELS
REVIT, IES, DWG, 3DS, Rhino, Sketchup

MATERIALS
Glass, Aluminum

TECHNICAL INFORMATION
Input Voltage
110–120V, 220–240V, 110–277V

Lamping
Integral 8W 24V DC LED
CRI 90+, 50,000 hours

Controls
Phase dimming, 0–10V, DALI

COLOUR TEMPERATURE OPTIONS
Warm — Neutral
2700K — 3000K — 3500K

DIM TO WARM
Warm / DIM - — Bright / DIM +
1800K — 3000K

MANUFACTURED
Canada

FINISHES
Float (FLT) — Translucent (TRN) — Umber (UMB)

For custom finishes, please inquire.

CERTIFICATIONS
Application: dry indoor location only

SERIES	SIZE	TYPE	FINISH	CCT	PS	VOLTAGE IN
PAC	28	CW	☐ FLT (FLOAT) ☐ TRN (TRANSLUCENT) ☐ UMB (UMBER)	☐ 27 (2700K) ☐ 30 (3000K) ☐ 35 (3500K) ☐ DW (DIM TO WARM)	☐ ELV ☐ 010 ☐ DAL**	☐ 120 ☐ 230 ☐ 277*

**DALI remote only
*277 only available with 010

Modified: 02/23/26
©2026 ANDSTUDIO DESIGNS INC.
All Rights Reserved.

1951 Franklin St
Vancouver, B.C.
Canada V5L 0C7

Sankt Peders Stræde
45B, 1453 Copenhagen
Denmark

+1 604 563 6938
INFO@A-N-D.COM
A-N-D.COM